## .30-30 Winchester

The .30-30 Winchester (aka .30 WCF) was developed for the Model 94 Winchester in 1895. To date, it is surpassed only by the .30-06 and .308 Winchester in popularity of .30-caliber cartridges.


Understandably, the old .30-30 Winchester doesn't offer the glitz and glitter that seems to go hand in hand with the newer cartridge innovations that have cropped up over the years, but it is perfectly adequate for the vast majority of deer hunters who prowl the



wooded hills and mountains throughout the Lower 48 and a great chunk of Canada.

A .30 WCF with a 150-grain XFN is just about the ideal medicine for whitetail, blacktail and mule deer within ranges that most are taken — by any cartridge.


Photo of Dale Rasmus




Case:
Remington
Primer:
Win Large Rifle

Barrel: 20"

Parent Case: None Trim To: 2.030"

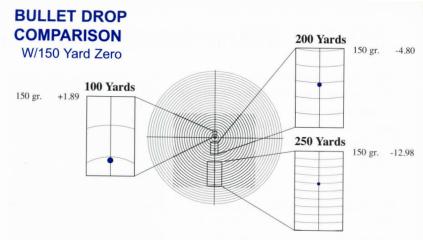

## **BULLET ENERGIES**





**150-grain XFN** S.D. .226 B.C. .269

Suggested Bullet Use



| 9<br>Powder | Charge<br>Weight<br>(grains) | Velocity<br>(fps) | Maximum<br>Load | Velocity<br>(fps) |
|-------------|------------------------------|-------------------|-----------------|-------------------|
| AA 2460     | 28.5                         | 1936              | 32.5            | 2208              |
| AA 2520     | 30.0                         | 2044              | 34.0            | 2317              |
| RL 12*      | 29.0                         | 1959              | 33.0            | 2229              |
| H322        | 27.0                         | 1930              | 31.0            | 2216              |
| H335        | 26.0                         | 1830              | 30.0            | 2111              |
| H4895       | 29.0                         | 1994              | 33.0            | 2269              |
| Varget      | 31.0                         | 2021              | 35.0            | 2282              |
| H414        | 35.0                         | 1951              | 39.0            | 2174              |
| IMR 3031    | 27.0                         | 1880              | 31.0            | 2158              |
| IMR 4895*   | 29.0                         | 1962              | 33.0            | 2233              |
| IMR 4320    | 30.0                         | 1917              | 34.0            | 2173              |
| IMR 4064    | 28.5                         | 1905              | 32.5            | 2172              |
| Norma 202   | 27.0                         | 1840              | 31.0            | 2113              |
| VIT N135    | 27.0                         | 1885              | 31.0            | 2164              |
| VIT N140    | 29.0                         | 1942              | 33.0            | 2210              |
| Win 748     | 31.0                         | 1988              | 35.0            | 2245              |
| Win 760     | 35.0                         | 1964              | 39.0            | 2189              |

XLC Coated X-Bullet data cannot be used with other bullets, including non-coated X-Bullets. Maximum loads should be used with caution - Always Start With Minimum Loads.