


Cartridge

9mm Luger - 115 grain

Version 9.0

NOSLER®

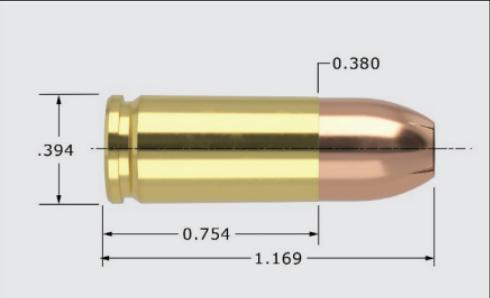

9mm Luger - 115 grain

9mm (.355")

MAXIMUM SAAMI O.A.C.L.		1.169"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®	SHG	115gr. JHP	1.100"	0.109	0.130
CASE TYPE:	Winchester		PRIMER TYPE	Rem 1-1/2	
CASE HOLDS:	10.0	Gr. WATER	BARREL Length/Make		4" Douglas
			BARREL Twist		1-16"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
HS-6	7.1 * MAX. 6.6 6.1	990 880 770			
Hi-Skor 700-X	4.2 MAX. 3.7 * 3.2	1091 924 758			
AA #5	6.7 MAX. 6.2 * 5.7	1091 1009 927			
Unique	6.1 MAX. 5.6 5.1 *	1120 1060 1000			
Blue Dot	8.5 MAX. 8.0 7.5 *	1130 1080 1030			
AutoComp	5.5 * MAX. 5.0 4.5	1138 1058 978			
True Blue	5.9 MAX. 5.4 * 4.9	1146 1075 1003			
CFE Pistol	5.8 * MAX. 5.3 4.8	1164 1059 954			
Power Pistol	6.6 MAX. 6.1 * 5.6	1196 1112 1029			
Most Accurate Powder Tested	8.5 * MAX. 8.0 7.5	1277 1212 1147			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested


** = Compressed load

Cartridge

9mm Luger - 124 grain

Version 9.0

NOSLER®

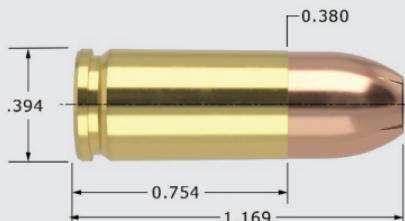

9mm Luger - 124 grain

9mm (.355")

MAXIMUM SAAMI O.A.C.L.		1.169"	TESTED O.A.C.L.	B.C.	S.D.		
Sporting Handgun®	SHG	124gr. JHP	1.120"	0.118	0.141		
CASE TYPE:	Winchester		PRIMER TYPE	Rem 1-1/2			
CASE HOLDS:	10.0 Gr. WATER		BARREL Length/Make	4" Douglas			
			BARREL Twist	1-16"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)				
AA #5	5.4	* MAX. 1039					
	4.9	954					
	4.4	869					
Hi-Skor 700-X	4.2	MAX. 1048					
	3.7	950					
	3.2 *	853					
IMR TARGET	4.3	MAX. 1063					
	3.8 *	948					
	3.3	833					
Titegroup	4.2	MAX. 1092					
	3.7 *	980					
	3.2	868					
True Blue	5.8	MAX. 1099					
	5.3 *	1004					
	4.8	909					
Power Pistol	6.1	MAX. 1111					
	5.6 *	1034					
	5.1	957					
CFE Pistol	5.3 *	MAX. 1127					
	4.8	1041					
	4.3	955					
Unique	5.6	MAX. 1141					
	5.1 *	1058					
	4.6	975					
AutoComp	5.1 *	MAX. 1144					
	4.6	1061					
	4.1	978					
AA #7	7.9	MAX. 1145					
	7.4	1087					
	6.9 *	1030					

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

"Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data."

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested


** = Compressed load

Cartridge

9mm Luger - 147 grain

Version 9.0

NOSLER®

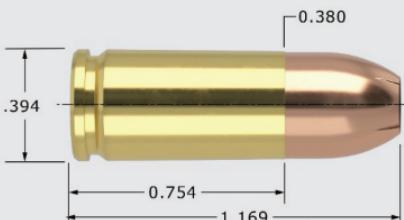

9mm Luger - 147 grain

9mm (.355")

MAXIMUM SAAMI O.A.C.L.	1.169"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	147gr. JHP	1.120"	0.156 0.167

CASE TYPE:	Nosler	PRIMER TYPE	WSP
CASE HOLDS:	8.4 Gr. WATER	BARREL Length/Make	4" Douglas
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Unique	3.6	MAX. 901	73%
	3.1	783	63%
	2.6	666	52%
3N37	4.5	MAX. 913	84%
	4.0	800	74%
	3.5	687	65%
N350	4.3	MAX. 935	90%
	3.8	808	79%
	3.3	681	69%
AA #7	5.9	MAX. 936	71%
	5.4	871	65%
	4.9	807	59%
CFE Pistol	4.1	MAX. 938	57%
	3.6	734	50%
	3.1	531	43%
HS-6	4.9	MAX. 940	64%
	4.4	834	57%
	3.9	729	51%
Blue Dot	5.2	MAX. 944	77%
	4.7	825	70%
	4.2	705	63%
Power Pistol	4.3	MAX. 947	68%
Most Accurate	3.8	856	60%
Powder Tested	3.3	766	52%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load