


30-06

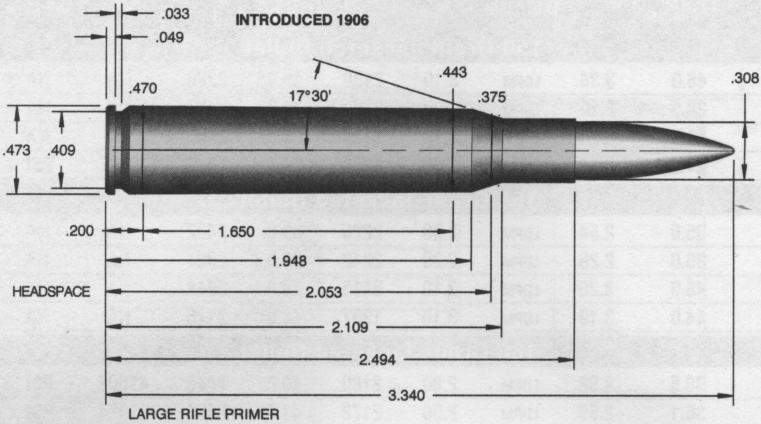

LEE SHELL HOLDER 2

Useful case capacity 4.38 cc

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
57 Grain Jacketed Bullet												
v-N110	31.1	2.59	LDPM	2.50	3527	38.4	3994	NA	NA	3.110	----	----
100 Grain Jacketed Bullet												
v-N540	55.4	3.88	LDPM	3.70	3081	63.0c	3471	NA	NA	3.142	----	----
v-N140	54.0	3.96	LDPM	4.00	3038	61.1c	3425	NA	NA	3.142	----	----
v-N135	50.1	3.89	LDPM	3.70	3041	56.5c	3389	NA	NA	3.142	----	----
v-N133	47.4	3.65	LDPM	3.40	2989	53.9	3333	NA	NA	3.142	----	----
v-N130	39.8	3.00	LDPM	2.80	2851	48.6	3274	NA	NA	3.142	----	----
RELODER 7	41.4	3.01	LDPM	2.80	2843	47.0	3188	NA	NA	2.935	----	----
110 Grain Jacketed Bullet												
RAM BIG GAME	59.0	4.18	LDPM	4.00	3236	65.5c	3522	59782	PSI	3.170	----	----
IMR4895	56.0	4.08	LDPM	4.00	3303	59.8	3505	57300	PSI	3.170	.9845	.9554
IMR3031	51.0	3.89	LDPM	3.70	3252	54.9	3471	57800	PSI	3.170	.9835	.9493
IMR4320	57.0	4.08	LDPM	4.00	3285	60.5	3470	58100	PSI	3.170	.9844	.9547
NORMA 201	54.0	3.93	LDPM	3.70	3284	57.1	3458	NA	NA	2.874	----	----
IMR4064	55.0	4.10	LDPM	4.00	3263	58.5	3453	56400	PSI	3.170	.9841	.9544
H-VARGET	55.0	4.02	LDPM	4.00	3308	59.0	3452	58200	PSI	3.170	.9895	.9782
H4895	51.0	3.71	LDPM	3.70	3155	57.0	3431	59160	PSI	3.170	.9861	.9617
ACCUR 4064	53.9	4.07	LDPM	4.00	3080	59.9c	3431	59446	PSI	3.170	----	----
IMR 8208 XBR	52.6	3.74	LDPM	3.70	3223	56.0	3415	57500	PSI	3.170	.9830	.9377
NORMA 202	54.0	4.03	LDPM	4.00	3209	56.5	3415	NA	NA	2.874	----	----
RAM TAC	49.8	3.34	LDPM	3.10	3185	55.3	3404	59600	PSI	3.170	----	----
BL-C(2)	54.0	3.48	LDPM	3.40	3108	60.0	3396	54000	PSI	3.170	.9853	.9644
BENCHMARK	51.5	3.68	LDPM	3.70	3242	55.0	3396	59760	PSI	3.170	.9869	.9751
ACCUR 2520	49.1	3.35	LDPM	3.10	3150	54.6	3387	59495	PSI	3.170	----	----
CFE 223	55.6	3.59	LDPM	3.40	3224	59.0	3370	56400	PSI	3.170	.9872	.9686
H335	50.0	3.22	LDPM	3.10	3168	55.5	3367	57720	PSI	3.170	.9890	.9819
R HUNTER	60.2	4.01	LDPM	4.00	3105	66.9c	3360	51275	PSI	3.210	----	----
ACCUR 2700	57.7	3.95	LDPM	3.70	3038	64.1c	3349	52991	PSI	3.170	----	----
WIN 748	46.4	3.04	LDPM	2.80	2961	52.7	3320	56400	PSI	3.170	----	----
RELODER15	52.8	3.73	LDPM	3.70	2949	60.0	3307	NA	NA	3.000	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR		
											VELOCITY	PRESSURE	
110 Grain Jacketed Bullet													
v-N150	55.1	4.11	LDPM	4.00	2969	60.8c	3287	NA	NA	2.913	----	----	
H414	57.0	3.77	LDPM	3.70	3044	62.5	3268	56280	PSI	3.170	.9870	.9679	
WIN 760	57.0	3.80	LDPM	3.70	3044	62.5	3268	56280	PSI	3.170	.9870	.9679	
v-N133	48.6	3.74	LDPM	3.70	2864	53.7	3225	NA	NA	2.913	----	----	
v-N140	52.2	3.83	LDPM	3.70	2890	57.7	3205	NA	NA	2.913	----	----	
v-N135	48.5	3.77	LDPM	3.70	2835	53.5	3163	NA	NA	2.913	----	----	
110 Grain Barnes X Solid Bullet													
RAM TAC	52.4	3.52	LDPM	3.40	3211	58.2	3507	59565	PSI	3.218	----	----	
ACCUR 2520	51.6	3.52	LDPM	3.40	3195	57.3	3484	59193	PSI	3.218	----	----	
ACCUR 4064	54.5	4.11	LDPM	4.00	3140	60.6c	3466	58068	PSI	3.218	----	----	
RAM BIG GAME	58.4	4.13	LDPM	4.00	3173	64.9c	3409	51126	PSI	3.218	----	----	
R HUNTER	59.6	3.97	LDPM	4.00	3019	66.2c	3304	49006	PSI	3.218	----	----	
ACCUR 2700	56.5	3.87	LDPM	3.70	2916	62.8	3210	44857	PSI	3.218	----	----	
115 Grain Jacketed Bullet													
RAM BIG GAME	59.4	4.21	LDPM	4.00	3228	66.0c	3506	59893	PSI	3.200	----	----	
R HUNTER	61.7	4.11	LDPM	4.00	3126	68.6c	3406	54883	PSI	3.200	----	----	
ACCUR 4064	54.0	4.08	LDPM	4.00	3076	59.9c	3399	59089	PSI	3.200	----	----	
ACCUR 2520	49.4	3.37	LDPM	3.40	3141	54.9	3365	59313	PSI	3.200	----	----	
RAM TAC	48.6	3.26	LDPM	3.10	3103	54.0	3336	59619	PSI	3.200	----	----	
ACCUR 2700	57.8	3.96	LDPM	4.00	3023	64.2c	3318	52167	PSI	3.200	----	----	
123 Grain Jacketed Bullet													
v-N150	55.4	4.13	LDPM	4.00	2887	60.3c	3202	NA	NA	3.142	----	----	
v-N540	53.9	3.78	LDPM	3.70	2831	59.1	3143	NA	NA	3.142	----	----	
v-N140	51.7	3.79	LDPM	3.70	2799	57.6	3123	NA	NA	3.142	----	----	
v-N135	49.2	3.82	LDPM	3.70	2795	53.7	3074	NA	NA	3.142	----	----	
v-N130	40.3	3.04	LDPM	2.80	2749	46.4	3064	NA	NA	3.142	----	----	
v-N133	45.5	3.50	LDPM	3.40	2707	51.1	3025	NA	NA	3.142	----	----	
125 Grain Jacketed Bullet													
IMR4064	53.0	3.95	LDPM	3.70	3129	56.5	3334	58000	PSI	3.150	.9822	.9440	
IMR4895	53.0	3.86	LDPM	3.70	3137	57.2	3331	56800	PSI	3.150	.9859	.9598	
RAM BIG GAME	57.2	4.05	LDPM	4.00	3059	63.5c	3331	59931	PSI	3.150	----	----	
ACCUR 2700	58.8	4.03	LDPM	4.00	3018	65.3c	3319	59229	PSI	3.150	----	----	
IMR4320	54.0	3.87	LDPM	3.70	3125	57.5	3307	57900	PSI	3.150	.9838	.9540	
IMR3031	49.0	3.73	LDPM	3.70	3091	52.8	3298	58400	PSI	3.150	.9832	.9450	
ACCUR 4064	52.5	3.96	LDPM	4.00	2979	58.4c	3294	59223	PSI	3.250	----	----	
IMR 4166	53.0	3.93	LDPM	3.70	3109	56.8	3286	59000	PSI	3.150	.9854	.9633	
BL-C(2)	53.0	3.42	LDPM	3.40	3117	58.7	3273	58440	PSI	3.150	.9914	.9574	
H-VARGET	54.0	3.95	LDPM	3.70	3159	57.2	3267	59400	PSI	3.150	----	----	
v-N540	53.9	3.78	LDPM	3.70	2887	60.3	3261	NA	NA	3.307	----	----	
R HUNTER	60.7	4.05	LDPM	4.00	3025	67.4c	3260	NA	NA	3.250	----	----	
IMR 8208 XBR	51.5	3.66	LDPM	3.70	3100	54.7	3243	57400	PSI	3.150	.9860	.9602	
H4895	48.0	3.49	LDPM	3.40	2977	53.7	3229	59160	PSI	3.150	.9858	.9698	
H335	49.0	3.16	LDPM	3.10	3046	54.0	3228	59160	PSI	3.150	.9884	.9730	
RAM TAC	49.0	3.29	LDPM	3.10	2982	54.4	3222	59062	PSI	3.150	----	----	
CFE 223	54.5	3.52	LDPM	3.40	3081	58.0	3212	58900	PSI	3.150	.9881	.9703	
ACCUR 2520	47.5	3.24	LDPM	3.10	2972	52.8	3188	59400	PSI	3.150	----	----	
H414	57.0	3.77	LDPM	3.70	2952	62.5	3181	56040	PSI	3.150	.9865	.9736	
WIN 760	57.0	3.80	LDPM	3.70	2952	62.5	3181	56040	PSI	3.150	.9865	.9736	

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
125 Grain Jacketed Bullet												
BENCHMARK	49.0	3.50	LDPM	3.40	2996	52.0	3178	58440	PSI	3.150	.9804	.9419
v-N150	51.5	3.84	LDPM	3.70	2894	58.8c	3169	NA	NA	3.307	----	----
v-N140	51.1	3.75	LDPM	3.70	2881	56.2	3143	NA	NA	3.307	----	----
IMR 4007 SSC	55.0	3.99	LDPM	4.00	2881	60.0	3136	53000	PSI	3.150	.9831	.9568
v-N550	57.1	3.95	LDPM	4.00	2936	60.3	3117	NA	NA	3.307	----	----
v-N135	47.8	3.71	LDPM	3.70	2838	52.5	3068	NA	NA	3.307	----	----
WIN 748	44.9	2.94	LDPM	2.80	2729	51.0	3060	55200	PSI	3.150	----	----
125 Grain FRANGIBLE												
RAM BIG GAME	57.4	4.06	LDPM	4.00	3077	63.7c	3334	59364	PSI	3.275	----	----
ACCUR 2520	48.9	3.34	LDPM	3.10	2988	54.3	3246	59404	PSI	3.275	----	----
ACCUR 4064	49.9	3.77	LDPM	3.70	2937	55.5	3222	59508	PSI	3.275	----	----
130 Grain Jacketed Bullet												
NORMA 202	52.0	3.88	LDPM	3.70	3054	55.6	3264	NA	NA	3.071	----	----
v-N540	52.5	3.68	LDPM	3.70	2844	59.7	3261	NA	NA	3.307	----	----
NORMA 203B	53.0	3.82	LDPM	3.70	3051	56.4	3261	NA	NA	3.071	----	----
IMR4064	51.0	3.80	LDPM	3.70	3070	54.5	3243	58200	PSI	3.060	.9845	.9548
IMR4895	51.0	3.71	LDPM	3.70	3074	54.7	3234	57800	PSI	3.060	.9862	.9657
NORMA 201	51.0	3.71	LDPM	3.70	3045	53.8	3225	NA	NA	3.071	----	----
v-N140	50.8	3.72	LDPM	3.70	2828	58.4	3213	NA	NA	3.307	----	----
IMR 4166	51.7	3.83	LDPM	3.70	3003	55.3	3213	59200	PSI	3.060	.9812	.9499
v-N150	54.0	4.03	LDPM	4.00	2858	60.0c	3202	NA	NA	3.307	----	----
IMR4320	51.0	3.65	LDPM	3.40	3094	54.5	3197	57700	PSI	3.060	.9906	.9895
BL-C(2)	52.0	3.35	LDPM	3.10	2936	58.0	3179	57960	PSI	3.060	.9869	.9548
IMR3031	47.0	3.58	LDPM	3.40	3010	50.3	3176	58300	PSI	3.150	.9837	.9516
H335	48.0	3.10	LDPM	3.10	2912	53.5	3158	58320	PSI	3.060	.9853	.9635
H414	56.0	3.70	LDPM	3.70	2862	62.0	3157	58440	PSI	3.060	.9839	.9701
H-VARGET	49.0	3.58	LDPM	3.40	2979	53.5	3154	58080	PSI	3.060	.9874	.9654
CFE 223	54.0	3.49	LDPM	3.40	3004	57.4	3145	59100	PSI	3.060	.9867	.9647
H4895	48.0	3.49	LDPM	3.40	2927	53.1	3144	55320	PSI	3.060	.9860	.9658
IMR 4007 SSC	54.0	3.91	LDPM	3.70	2888	59.0	3140	57100	PSI	3.060	.9835	.9548
IMR 8208 XBR	49.1	3.49	LDPM	3.40	3021	51.7	3126	56900	PSI	3.060	----	----
v-N135	47.5	3.69	LDPM	3.70	2766	54.0	3123	NA	NA	3.307	----	----
BENCHMARK	48.0	3.43	LDPM	3.40	2986	51.0	3107	58440	PSI	3.060	.9867	.9733
130 Grain Barnes X Solid Bullet												
RAM BIG GAME	58.1	4.11	LDPM	4.00	3054	64.5c	3324	59655	PSI	3.218	----	----
ACCUR 4064	51.7	3.90	LDPM	3.70	2918	57.4	3215	58964	PSI	3.218	----	----
RAM TAC	48.9	3.28	LDPM	3.10	2942	54.3	3204	59227	PSI	3.218	----	----
ACCUR 2520	48.7	3.32	LDPM	3.10	2934	54.2	3196	NA	NA	3.218	----	----
R HUNTER	59.6	3.97	LDPM	4.00	2925	66.3c	3187	52410	PSI	3.218	----	----
ACCUR 2700	56.4	3.86	LDPM	3.70	2901	62.6	3133	50143	PSI	3.218	----	----
135 Grain Jacketed Bullet												
R HUNTER	60.3	4.02	LDPM	4.00	2985	67.0c	3223	57037	PSI	3.300	----	----
RAM BIG GAME	53.4	3.78	LDPM	3.70	2924	59.3	3148	59277	PSI	3.300	----	----
ACCUR 4064	49.6	3.74	LDPM	3.70	2839	55.1	3117	59634	PSI	3.300	----	----
ACCUR 2700	53.1	3.64	LDPM	3.40	2815	59.0	3116	59553	PSI	3.300	----	----
140 Grain Barnes X Solid Bullet												
RAM BIG GAME	53.6	3.79	LDPM	3.70	2875	59.5	3113	59700	PSI	3.270	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
140 Grain Barnes X Solid Bullet												
ACCUR 2700	51.6	3.53	LDPM	3.40	2782	57.3	3043	59008	PSI	3.270	----	----
R HUNTER	55.3	3.69	LDPM	3.70	2756	61.4	3024	54169	PSI	3.270	----	----
ACCUR 4064	46.8	3.53	LDPM	3.40	2709	52.0	2995	59455	PSI	3.270	----	----
ACCUR 2520	44.8	3.06	LDPM	2.80	2689	49.7	2975	59647	PSI	3.270	----	----
RAM TAC	43.8	2.94	LDPM	2.80	2682	48.6	2947	59286	PSI	3.270	----	----
150 Grain Jacketed Bullet												
H-SUPRFORM	60.0	3.95	LDPM	3.70	2850	65.0	3072	53000	PSI	3.250	.9850	.9595
H4350	56.0	4.06	LDPM	4.00	2792	62.0c	3068	58080	PSI	3.250	----	----
ACCUR 2700	53.1	3.64	LDPM	3.40	2799	59.0	3041	59348	PSI	3.325	----	----
RAM BIG GAME	51.8	3.67	LDPM	3.70	2785	57.5	3033	59784	PSI	3.325	----	----
NORMA 203B	50.0	3.61	LDPM	3.40	2897	53.2	3028	NA	NA	3.228	----	----
IMR4320	49.0	3.51	LDPM	3.40	2850	52.3	3016	58000	PSI	3.250	.9829	.9651
IMR4895	49.0	3.57	LDPM	3.40	2856	53.0	3009	56700	PSI	3.250	.9869	.9661
R HUNTER	56.9	3.79	LDPM	3.70	2801	63.2	3008	53189	PSI	3.210	----	----
RELODER 17	51.0	3.55	LDPM	3.40	2681	58.0	3006	NA	NA	3.250	----	----
H380	53.0	3.66	LDPM	3.70	2798	59.0	3005	55080	PSI	3.250	.9881	.9781
WIN 760	54.0	3.60	LDPM	3.40	2792	60.0	2992	58320	PSI	3.250	.9886	.9701
H414	54.0	3.57	LDPM	3.40	2753	60.0	2992	58320	PSI	3.250	.9862	.9701
H335	47.0	3.03	LDPM	2.80	2785	51.5	2982	59040	PSI	3.250	.9850	.9680
ACCUR 2520	45.2	3.09	LDPM	3.10	2757	50.2	2978	59324	PSI	3.185	----	----
H4895	46.0	3.35	LDPM	3.10	2806	51.0	2976	58200	PSI	3.250	.9883	.9825
H-VARGET	47.0	3.44	LDPM	3.40	2808	51.0	2975	60000	PSI	3.250	.9855	.9608
IMR 4007 SSC	52.4	3.80	LDPM	3.70	2799	55.3	2972	58000	PSI	3.250	----	----
IMR 4451	53.7	3.83	LDPM	3.70	2747	57.8	2969	59700	PSI	3.250	.9811	.9529
BL-C(2)	49.0	3.16	LDPM	3.10	2759	54.0	2962	58320	PSI	3.250	.9860	.9604
ACCUR 4064	46.8	3.53	LDPM	3.40	2694	52.0	2955	59533	PSI	3.325	----	----
BENCHMARK	46.5	3.32	LDPM	3.10	2792	49.5	2944	59160	PSI	3.250	.9824	.9672
IMR4350	54.0	3.97	LDPM	4.00	2745	58.0	2942	57200	PSI	3.250	.9827	.9541
CFE 223	50.1	3.24	LDPM	3.10	2763	54.2	2942	58600	PSI	3.250	.9848	.9644
RAM TAC	44.4	2.98	LDPM	2.80	2695	49.3	2939	59630	PSI	3.210	----	----
IMR 8208 XBR	47.0	3.34	LDPM	3.10	2797	50.0	2935	58400	PSI	3.250	.9841	.9527
IMR 4166	47.0	3.48	LDPM	3.40	2755	50.9	2935	58100	PSI	3.250	.9839	.9583
v-N540	45.4	3.18	LDPM	3.10	2434	53.5	2930	NA	NA	3.028	----	----
IMR4064	47.0	3.50	LDPM	3.40	2743	51.0	2928	58600	PSI	3.250	.9839	.9563
v-N550	48.1	3.33	LDPM	3.10	2628	53.7	2907	NA	NA	3.028	----	----
IMR3031	43.0	3.28	LDPM	3.10	2697	46.7	2887	59300	PSI	3.250	.9818	.9423
ACCUR 4350	53.7	3.97	LDPM	4.00	2594	59.6c	2886	46598	PSI	3.185	----	----
v-N150	44.1	3.29	LDPM	3.10	2549	49.7	2815	NA	NA	3.028	----	----
v-N140	43.7	3.20	LDPM	3.10	2402	51.2	2812	NA	NA	3.028	----	----
WIN 748	42.2	2.77	LDPM	2.50	2506	48.0	2810	55200	PSI	3.250	----	----
v-N135	40.1	3.12	LDPM	3.10	2333	47.7	2740	NA	NA	3.028	----	----
RELODER15	45.8	3.23	LDPM	3.10	2433	52.0	2728	NA	NA	3.250	----	----
RELODER19	54.6	3.85	LDPM	3.70	2427	62.0	2722	NA	NA	3.250	----	----
IMR TRAIL BOS	13.3	2.89	LDPM	2.80	1061	19.0	1477	26400	PSI	3.250	.9432	.9024
150 Grain Barnes X Solid Bullet												
R HUNTER	56.6	3.77	LDPM	3.70	2780	62.9	3027	54993	PSI	3.205	----	----
RAM BIG GAME	50.9	3.60	LDPM	3.40	2747	56.6	2995	59836	PSI	3.300	----	----
ACCUR 2700	50.9	3.49	LDPM	3.40	2749	56.6	2988	59706	PSI	3.300	----	----
IMR 4451	54.0	3.85	LDPM	3.70	2798	57.5	2947	58900	PSI	3.300	.9851	.9687

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
150 Grain Barnes X Solid Bullet												
H414	53.0	3.50	LDPM	3.40	2779	57.0	2945	57100	PSI	3.300	.9857	.9639
WIN 760	53.0	3.53	LDPM	3.40	2779	57.0	2945	57100	PSI	3.300	.9857	.9639
IMR4350	54.0	3.97	LDPM	4.00	2744	57.5	2930	57300	PSI	3.300	.9816	.9552
H4350	54.0	3.92	LDPM	3.70	2747	57.8	2927	57700	PSI	3.300	.9835	.9475
CFE 223	49.0	3.17	LDPM	3.10	2715	53.2	2927	58600	PSI	3.300	.9824	.9517
IMR4064	47.0	3.50	LDPM	3.40	2714	51.0	2926	59500	PSI	3.300	.9813	.9511
H380	53.0	3.66	LDPM	3.70	2763	57.0	2921	57300	PSI	3.300	.9863	.9684
IMR 4166	45.3	3.36	LDPM	3.10	2729	49.3	2921	59100	PSI	3.300	.9830	.9610
BL-C(2)	50.0	3.22	LDPM	3.10	2777	53.5	2915	57900	PSI	3.300	.9861	.9660
IMR 4007 SSC	52.0	3.77	LDPM	3.70	2729	55.3	2901	57800	PSI	3.300	.9817	.9564
IMR4895	47.0	3.42	LDPM	3.40	2717	50.8	2900	58700	PSI	3.300	.9829	.9587
IMR4320	48.0	3.44	LDPM	3.40	2695	52.0	2897	58100	PSI	3.300	.9821	.9554
ACCUR 4064	45.2	3.41	LDPM	3.40	2630	50.3	2897	59335	PSI	3.300	----	----
H4895	43.0	3.13	LDPM	3.10	2658	47.5	2863	59700	PSI	3.300	.9836	.9571
H-VARGET	46.0	3.36	LDPM	3.40	2697	49.5	2860	58000	PSI	3.300	.9834	.9579
WIN 748	48.0	3.14	LDPM	3.10	2704	51.5	2859	55400	PSI	3.300	.9843	.9599
BENCHMARK	44.0	3.14	LDPM	3.10	2631	48.0	2850	58600	PSI	3.300	.9800	.9432
H335	44.0	2.84	LDPM	2.80	2671	48.0	2842	59200	PSI	3.300	.9847	.9662
IMR 8208 XBR	44.0	3.13	LDPM	3.10	2677	47.7	2838	58500	PSI	3.300	.9844	.9590
IMR3031	43.0	3.28	LDPM	3.10	2644	46.0	2811	56600	PSI	3.300	.9797	.9439
155 Grain A-MAX												
R HUNTER	56.7	3.78	LDPM	3.70	2807	63.0	3028	55295	PSI	3.210	----	----
RAM BIG GAME	51.9	3.67	LDPM	3.70	2777	57.6	3012	59371	PSI	3.210	----	----
ACCUR 2700	52.1	3.57	LDPM	3.40	2710	57.9	2992	59703	PSI	3.210	----	----
ACCUR 4064	47.9	3.62	LDPM	3.40	2699	53.3	2963	59654	PSI	3.210	----	----
ACCUR 2520	43.8	2.99	LDPM	2.80	2615	48.7	2883	59001	PSI	3.210	----	----
RAM TAC	42.5	2.85	LDPM	2.80	2589	47.3	2834	59146	PSI	3.210	----	----
ACCUR 4350	52.6	3.89	LDPM	3.70	2512	58.5	2831	48762	PSI	3.210	----	----
155 Grain Jacketed Bullet												
H-SUPRFORM	59.0	3.88	LDPM	3.70	2843	65.2	3125	58800	PSI	3.225	.9849	.9522
R HUNTER	57.9	3.86	LDPM	3.70	2837	64.3	3092	59009	PSI	3.320	----	----
H4350	56.0	4.06	LDPM	4.00	2757	62.0c	3038	57000	PSI	3.225	----	----
IMR4895	50.0	3.64	LDPM	3.40	2851	53.8	3010	58000	PSI	3.225	.9858	.9607
H380	53.0	3.66	LDPM	3.70	2789	59.0	3009	57360	PSI	3.225	.9875	.9712
RAM BIG GAME	51.8	3.67	LDPM	3.70	2782	57.6	3007	59488	PSI	3.320	----	----
IMR4064	49.0	3.65	LDPM	3.40	2811	53.0	3005	58800	PSI	3.225	.9833	.9445
IMR 4451	55.0	3.92	LDPM	3.70	2748	59.2	2988	59600	PSI	3.225	.9804	.9521
IMR4320	49.0	3.51	LDPM	3.40	2823	53.0	2976	57900	PSI	3.225	.9868	.9678
ACCUR 4064	48.1	3.63	LDPM	3.40	2703	53.5	2975	59664	PSI	3.320	----	----
IMR 4007 SSC	53.0	3.84	LDPM	3.70	2766	57.2	2964	58800	PSI	3.225	.9838	.9566
ACCUR 2700	51.3	3.51	LDPM	3.40	2699	57.0	2963	59289	PSI	3.320	----	----
IMR4350	56.0	4.12	LDPM	4.00	2784	60.0c	2959	53800	PSI	3.225	.9850	.9606
v-N160	53.2	3.90	LDPM	3.70	2680	58.2	2959	NA	NA	3.307	----	----
IMR 4166	47.4	3.51	LDPM	3.40	2743	51.5	2959	58900	PSI	3.225	.9818	.9503
H-VARGET	48.0	3.51	LDPM	3.40	2822	50.7	2958	58560	PSI	3.225	----	----
H414	54.0	3.57	LDPM	3.40	2732	60.0	2956	55440	PSI	3.225	.9870	.9746
v-N550	49.2	3.41	LDPM	3.40	2661	53.7	2949	NA	NA	3.307	----	----
IMR3031	46.0	3.51	LDPM	3.40	2779	49.0	2944	58600	PSI	3.225	.9811	.9330
H335	47.0	3.03	LDPM	2.80	2776	51.5	2943	58560	PSI	3.225	.9870	.9682

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

30-06 SPRINGFIELD**STARTING LOADS**

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
155 Grain Jacketed Bullet												
H4895	46.0	3.35	LDPM	3.10	2752	51.0	2925	54720	PSI	3.225	.9879	.9799
BENCHMARK	46.5	3.32	LDPM	3.10	2779	49.5	2916	59280	PSI	3.225	.9843	.9359
BL-C(2)	49.0	3.16	LDPM	3.10	2723	54.0	2912	55560	PSI	3.225	.9868	.9653
v-N540	47.1	3.30	LDPM	3.10	2539	53.3	2907	NA	NA	3.307	----	----
RAM TAC	43.5	2.92	LDPM	2.80	2666	48.3	2892	59553	PSI	3.250	----	----
CFE 223	49.2	3.18	LDPM	3.10	2744	52.3	2879	59500	PSI	3.225	.9844	.9587
ACCUR 4350	54.2	4.01	LDPM	4.00	2592	60.2c	2877	48258	PSI	3.250	----	----
ACCUR 2520	43.9	3.00	LDPM	2.80	2647	48.7	2874	59409	PSI	3.320	----	----
IMR 8208 XBR	46.1	3.27	LDPM	3.10	2747	49.0	2869	57500	PSI	3.225	.9852	.9556
v-N150	43.0	3.21	LDPM	3.10	2516	50.9	2831	NA	NA	3.307	----	----
v-N140	42.9	3.14	LDPM	3.10	2477	49.8	2789	NA	NA	3.307	----	----
156 Grain Jacketed Bullet												
v-N150	49.1	3.66	LDPM	3.70	2562	54.5	2831	NA	NA	3.169	----	----
v-N140	47.8	3.50	LDPM	3.40	2543	52.8	2818	NA	NA	3.169	----	----
v-N135	45.8	3.56	LDPM	3.40	2546	50.8	2792	NA	NA	3.169	----	----
160 Grain Lead Bullet												
ACCUR 5744	27.0	2.03	LDPM	1.90	2085	27.0	2085	NA	NA	3.035	----	----
165 Grain Jacketed Bullet												
R HUNTER	55.7	3.71	LDPM	3.70	2746	61.9	2991	59840	PSI	3.305	----	----
H-SUPRFORM	55.0	3.62	LDPM	3.40	2724	61.0	2972	58800	PSI	3.300	.9856	.9568
H4350	53.0	3.84	LDPM	3.70	2678	59.0	2938	59280	PSI	3.300	.9847	.9589
IMR4350	56.0	4.12	LDPM	4.00	2746	60.0c	2934	57600	PSI	3.300	.9835	.9559
ACCUR 4350	53.3	3.94	LDPM	3.70	2626	59.3c	2908	59309	PSI	3.305	----	----
IMR4064	49.0	3.65	LDPM	3.40	2752	52.5	2901	58900	PSI	3.300	.9852	.9565
RAM BIG GAME	50.0	3.54	LDPM	3.40	2660	55.5	2900	59819	PSI	3.305	----	----
H380	51.0	3.52	LDPM	3.40	2669	56.5	2892	60000	PSI	3.300	.9854	.9675
ACCUR 2700	50.4	3.45	LDPM	3.40	2662	56.0	2890	59338	PSI	3.305	----	----
IMR4895	49.0	3.57	LDPM	3.40	2768	52.0	2888	57200	PSI	3.300	.9858	.9593
H414	51.0	3.37	LDPM	3.40	2678	56.5	2877	59640	PSI	3.300	.9870	.9694
WIN 760	51.0	3.40	LDPM	3.40	2678	56.5	2877	59640	PSI	3.300	.9870	.9542
RELODER 17	49.7	3.46	LDPM	3.40	2562	56.5	2874	NA	NA	3.250	----	----
H-VARGET	47.0	3.44	LDPM	3.40	2726	50.5	2873	59640	PSI	3.300	.9850	.9689
IMR4320	48.0	3.44	LDPM	3.40	2727	51.2	2869	58600	PSI	3.300	.9843	.9558
IMR 4007 SSC	54.3	3.94	LDPM	3.70	2800	55.9	2867	58300	PSI	3.300	----	----
IMR 4451	53.3	3.80	LDPM	3.70	2658	57.4	2858	59200	PSI	3.300	.9826	.9554
ACCUR 4064	45.8	3.46	LDPM	3.40	2577	50.8	2836	59357	PSI	3.305	----	----
IMR 4166	45.1	3.34	LDPM	3.10	2625	49.1	2832	58900	PSI	3.300	.9812	.9491
NORMA 203B	50.0	3.61	LDPM	3.40	2592	52.5	2828	NA	NA	3.228	----	----
IMR3031	45.0	3.43	LDPM	3.40	2707	48.0	2825	57500	PSI	3.300	.9858	.9608
BL-C(2)	46.0	2.97	LDPM	2.80	2608	51.0	2805	59760	PSI	3.300	.9856	.9628
HYBRID100	53.0	3.85	LDPM	3.70	2648	57.0	2801	52800	PSI	3.300	.9861	.9661
BENCHMARK	45.0	3.22	LDPM	3.10	2686	47.7	2795	59160	PSI	3.300	.9851	.9715
H4895	43.0	3.13	LDPM	3.10	2607	47.5	2782	58800	PSI	3.300	.9858	.9617
H335	42.0	2.71	LDPM	2.50	2515	47.0	2749	59160	PSI	3.300	.9822	.9518
ACCUR 2520	41.9	2.86	LDPM	2.80	2577	46.6	2741	59664	PSI	3.305	----	----
CFE 223	46.5	3.00	LDPM	2.80	2612	49.5	2731	58700	PSI	3.300	.9853	.9659
IMR 8208 XBR	44.6	3.17	LDPM	3.10	2667	46.5	2728	58000	PSI	3.300	----	----
RELODER22	54.6	3.80	LDPM	3.70	2430	62.0	2725	NA	NA	3.250	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
165 Grain Jacketed Bullet												
RELODER19	51.9	3.67	LDPM	3.70	2331	59.0	2614	NA	NA	3.250	----	----
165 Grain Solid Bullet												
HYBRID100	52.5	3.81	LDPM	3.70	2653	56.7	2818	56700	PSI	3.225	.9857	.9640
H380	52.0	3.59	LDPM	3.40	2652	56.0	2788	57300	PSI	3.225	.9877	.9793
IMR 4166	45.0	3.33	LDPM	3.10	2607	48.2	2788	59500	PSI	3.225	.9791	.9453
H4350	51.0	3.70	LDPM	3.70	2587	55.4	2781	59200	PSI	3.225	.9836	.9562
H414	50.0	3.31	LDPM	3.10	2656	53.1	2773	58500	PSI	3.225	.9861	.9651
WIN 760	50.0	3.33	LDPM	3.10	2656	53.1	2773	58500	PSI	3.225	.9861	.9651
MR4350	52.0	3.82	LDPM	3.70	2546	56.6	2770	58200	PSI	3.225	.9819	.9533
IMR 4007 SSC	49.0	3.55	LDPM	3.40	2594	52.4	2762	57600	PSI	3.225	.9816	.9518
IMR4895	44.4	3.23	LDPM	3.10	2535	47.8	2757	58400	PSI	3.225	.9757	.9268
IMR 4451	50.4	3.59	LDPM	3.40	2532	54.3	2751	58300	PSI	3.225	.9790	.9524
IMR4320	45.6	3.26	LDPM	3.10	2515	49.6	2731	58700	PSI	3.225	.9796	.9398
IMR4064	44.4	3.31	LDPM	3.10	2510	48.2	2729	58600	PSI	3.225	.9782	.9323
H-VARGET	44.5	3.25	LDPM	3.10	2526	48.3	2724	59000	PSI	3.225	.9802	.9398
IMR 8208 XBR	43.2	3.07	LDPM	3.10	2572	47.0	2717	58300	PSI	3.225	.9856	.9644
H4895	43.4	3.16	LDPM	3.10	2595	46.7	2712	57100	PSI	3.225	.9868	.9623
BL-C(2)	43.9	2.83	LDPM	2.80	2511	47.5	2706	58800	PSI	3.225	.9795	.9517
IMR3031	41.0	3.12	LDPM	3.10	2510	44.1	2685	58100	PSI	3.225	.9784	.9299
CFE 223	43.9	2.84	LDPM	2.80	2531	46.7	2672	57500	PSI	3.225	.9807	.9594
165 Grain Barnes X Solid Bullet												
R HUNTER	55.5	3.70	LDPM	3.70	2687	61.7	2924	55423	PSI	3.205	----	----
ACCUR 2700	51.3	3.51	LDPM	3.40	2638	57.0	2913	59612	PSI	3.205	----	----
RAM BIG GAME	50.7	3.59	LDPM	3.40	2669	56.4	2910	59731	PSI	3.205	----	----
ACCUR 4064	47.1	3.55	LDPM	3.40	2578	52.3	2855	59441	PSI	3.205	----	----
ACCUR 4350	51.1	3.78	LDPM	3.70	2404	56.8	2709	48173	PSI	3.205	----	----
167 Grain Jacketed Bullet												
v-N550	49.7	3.44	LDPM	3.40	2556	55.1	2805	NA	NA	3.307	----	----
v-N160	55.5	4.07	LDPM	4.00	2457	61.7c	2762	NA	NA	3.307	----	----
v-N540	45.4	3.18	LDPM	3.10	2418	52.0	2743	NA	NA	3.307	----	----
v-N150	47.2	3.52	LDPM	3.40	2454	52.2	2694	NA	NA	3.307	----	----
v-N140	45.5	3.34	LDPM	3.10	2418	50.1	2664	NA	NA	3.307	----	----
v-N135	42.4	3.29	LDPM	3.10	2449	46.6	2651	NA	NA	3.307	----	----
168 Grain A-MAX												
R HUNTER	54.4	3.63	LDPM	3.40	2715	60.5	2945	59664	PSI	3.330	----	----
ACCUR 4350	53.4	3.95	LDPM	3.70	2562	59.3c	2855	55219	PSI	3.330	----	----
RAM BIG GAME	49.0	3.47	LDPM	3.40	2629	54.4	2845	59365	PSI	3.330	----	----
ACCUR 2700	50.0	3.42	LDPM	3.40	2575	55.5	2835	59830	PSI	3.330	----	----
ACCUR 4064	46.1	3.48	LDPM	3.40	2576	51.2	2816	59403	PSI	3.330	----	----
168 Grain Jacketed Bullet												
R HUNTER	53.6	3.57	LDPM	3.40	2695	59.5	2931	59303	PSI	3.285	----	----
IMR4350	54.0	3.97	LDPM	4.00	2720	58.0	2903	57800	PSI	3.230	.9837	.9571
H4350	55.0	3.99	LDPM	4.00	2695	59.0	2897	57720	PSI	3.230	.9821	.9572
NORMA 203B	50.0	3.61	LDPM	3.40	2644	52.8	2867	NA	NA	3.228	----	----
ACCUR 4350	53.1	3.93	LDPM	3.70	2596	59.0	2866	55789	PSI	3.285	----	----
H380	51.0	3.52	LDPM	3.40	2648	56.5	2859	59640	PSI	3.230	.9861	.9732
H-VARGET	47.0	3.44	LDPM	3.40	2710	50.5	2859	59040	PSI	3.230	.9847	.9603

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
168 Grain Jacketed Bullet												
IMR4895	48.0	3.49	LDPM	3.40	2719	51.2	2859	58200	PSI	3.230	.9845	.9531
ACCUR 2700	50.1	3.43	LDPM	3.40	2623	55.6	2855	59367	PSI	3.285	----	----
IMR4064	47.0	3.50	LDPM	3.40	2660	50.8	2850	57900	PSI	3.230	.9819	.9455
RELODER 17	49.3	3.43	LDPM	3.40	2541	56.0	2850	NA	NA	3.295	----	----
RAM BIG GAME	49.0	3.47	LDPM	3.40	2637	54.4	2844	59823	PSI	3.330	----	----
ACCUR 4064	46.4	3.50	LDPM	3.40	2610	51.5	2840	59116	PSI	3.330	----	----
WIN 760	53.0	3.53	LDPM	3.40	2686	56.5	2839	59640	PSI	3.230	.9842	.9419
H414	53.0	3.50	LDPM	3.40	2686	56.5	2839	59640	PSI	3.230	.9842	.9419
IMR 4451	52.7	3.76	LDPM	3.70	2646	56.7	2837	59300	PSI	3.230	.9827	.9592
HYBRID100	52.0	3.78	LDPM	3.70	2645	57.0	2817	57400	PSI	3.230	.9874	.9743
IMR4320	46.0	3.29	LDPM	3.10	2646	49.7	2816	58400	PSI	3.230	.9833	.9532
IMR 4007 SSC	49.0	3.55	LDPM	3.40	2574	53.5	2798	57900	PSI	3.230	.9815	.9520
IMR 4166	44.7	3.31	LDPM	3.10	2610	48.6	2794	59200	PSI	3.230	.9825	.9536
H4895	43.0	3.13	LDPM	3.10	2574	47.5	2789	60000	PSI	3.230	.9823	.9579
BL-C(2)	46.0	2.97	LDPM	2.80	2555	51.0	2767	59040	PSI	3.230	.9841	.9551
BENCHMARK	44.0	3.14	LDPM	3.10	2614	47.2	2760	59280	PSI	3.230	.9831	.9569
IMR 8208 XBR	45.1	3.20	LDPM	3.10	2661	48.0	2748	58700	PSI	3.230	.9888	.9766
RELODER19	53.7	3.79	LDPM	3.70	2405	61.0	2697	NA	NA	3.295	----	----
ACCUR 2520	40.2	2.74	LDPM	2.50	2491	44.6	2681	59480	PSI	3.285	----	----
RAM TAC	40.2	2.70	LDPM	2.50	2484	44.7	2680	59068	PSI	3.285	----	----
H335	42.0	2.71	LDPM	2.50	2459	46.5	2656	59400	PSI	3.230	.9831	.9532
168 Grain Barnes X Solid Bullet												
R HUNTER	54.2	3.61	LDPM	3.40	2680	60.3	2924	59100	PSI	3.330	----	----
RAM BIG GAME	49.5	3.50	LDPM	3.40	2606	55.0	2844	59777	PSI	3.330	----	----
ACCUR 2700	48.5	3.32	LDPM	3.10	2557	53.9	2817	59505	PSI	3.300	----	----
ACCUR 4064	45.2	3.41	LDPM	3.40	2517	50.2	2763	59462	PSI	3.300	----	----
v-N160	50.2	3.68	LDPM	3.70	2444	56.3	2733	NA	NA	3.217	----	----
v-N550	45.7	3.16	LDPM	3.10	2411	50.3	2707	NA	NA	3.217	----	----
v-N540	42.1	2.95	LDPM	2.80	2411	47.7	2703	NA	NA	3.217	----	----
ACCUR 4350	49.6	3.67	LDPM	3.70	2407	55.1	2697	52267	PSI	3.300	----	----
170 Grain Jacketed Bullet												
v-N160	56.3	4.13	LDPM	4.00	2510	62.5c	2799	NA	NA	3.307	----	----
v-N550	48.9	3.39	LDPM	3.40	2448	55.7	2762	NA	NA	3.307	----	----
v-N540	45.7	3.20	LDPM	3.10	2392	51.5	2694	NA	NA	3.307	----	----
v-N150	47.2	3.52	LDPM	3.40	2411	52.6	2674	NA	NA	3.307	----	----
v-N140	44.9	3.29	LDPM	3.10	2352	50.0	2621	NA	NA	3.307	----	----
170 Grain Solid Bullet												
v-N160	52.3	3.84	LDPM	3.70	2480	57.7	2776	NA	NA	3.228	----	----
v-N550	48.8	3.38	LDPM	3.40	2497	52.8	2772	NA	NA	3.228	----	----
v-N150	39.2	2.92	LDPM	2.80	2470	48.1	2697	NA	NA	3.228	----	----
173 Grain Lead Bullet												
ACCUR 5744	25.0	1.88	LDPM	1.90	1920	25.0	1920	NA	NA	3.015	----	----
175 Grain Jacketed Bullet												
H-SUPRFORM	53.0	3.49	LDPM	3.40	2609	58.7	2881	59400	PSI	3.300	.9827	.9432
R HUNTER	52.6	3.51	LDPM	3.40	2637	58.5	2871	NA	NA	3.290	----	----
H4350	55.0	3.99	LDPM	4.00	2661	59.0	2842	58440	PSI	3.300	.9837	.9642
ACCUR 4350	52.7	3.90	LDPM	3.70	2573	58.5	2828	56297	PSI	3.290	----	----
RAM BIG GAME	48.5	3.43	LDPM	3.40	2598	53.9	2801	59885	PSI	3.290	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR		
											VELOCITY	PRESSURE	
175 Grain Jacketed Bullet													
ACCUR 2700	49.3	3.38	LDPM	3.40	2544	54.8	2800	59258	PSI	3.290	----	----	
H414	52.5	3.47	LDPM	3.40	2622	56.2	2794	59040	PSI	3.300	.9831	.9500	
WIN 760	52.5	3.50	LDPM	3.40	2622	56.2	2794	59040	PSI	3.300	.9831	.9500	
ACCUR 4064	45.8	3.46	LDPM	3.40	2572	50.9	2790	59462	PSI	3.290	----	----	
IMR 4166	44.4	3.29	LDPM	3.10	2605	48.3	2782	56800	PSI	3.300	.9831	.9608	
IMR4831	54.0	3.97	LDPM	4.00	2615	57.5	2781	56900	PSI	3.300	.9827	.9531	
IMR4350	52.0	3.82	LDPM	3.70	2546	57.0	2780	57100	PSI	3.300	.9825	.9535	
BL-C(2)	48.5	3.13	LDPM	3.10	2644	51.5	2765	58440	PSI	3.300	.9854	.9675	
IMR 4451	52.0	3.71	LDPM	3.70	2548	56.0	2762	58900	PSI	3.300	.9800	.9475	
HYBRID100	50.0	3.63	LDPM	3.40	2543	55.0	2757	57600	PSI	3.300	.9840	.9618	
IMR 4007 SSC	48.0	3.48	LDPM	3.40	2526	53.0	2755	58900	PSI	3.300	.9827	.9546	
IMR4064	46.5	3.46	LDPM	3.40	2626	49.5	2741	58000	PSI	3.300	.9858	.9643	
IMR4895	46.0	3.35	LDPM	3.10	2619	49.0	2741	58100	PSI	3.300	.9849	.9612	
H4831	57.0	4.13	LDPM	4.00	2535	61.5c	2719	53280	PSI	3.300	----	----	
H380	49.5	3.42	LDPM	3.40	2564	53.0	2704	58080	PSI	3.300	.9849	.9693	
H4895	43.8	3.19	LDPM	3.10	2584	46.7	2700	58800	PSI	3.300	.9848	.9643	
IMR4320	45.5	3.26	LDPM	3.10	2533	48.5	2697	58200	PSI	3.300	.9793	.9378	
H-VARGET	45.0	3.29	LDPM	3.10	2551	48.0	2694	58800	PSI	3.300	.9818	.9475	
H335	43.0	2.77	LDPM	2.80	2566	45.7	2667	59280	PSI	3.300	.9858	.9786	
ACCUR 2520	39.9	2.72	LDPM	2.50	2440	44.3	2639	59782	PSI	3.290	----	----	
RAM TAC	40.1	2.69	LDPM	2.50	2457	44.6	2634	59426	PSI	3.290	----	----	
180 Grain Jacketed Bullet													
H-SUPRFORM	54.0	3.56	LDPM	3.40	2628	59.7	2840	57600	PSI	3.300	.9863	.9620	
R HUNTER	52.6	3.51	LDPM	3.40	2596	58.5	2824	59469	PSI	3.305	----	----	
H4350	52.0	3.77	LDPM	3.70	2543	57.5	2798	59160	PSI	3.300	.9827	.9529	
RELODER 17	48.0	3.34	LDPM	3.10	2463	54.5	2762	NA	NA	3.250	----	----	
IMR4350	53.0	3.90	LDPM	3.70	2586	56.5	2752	57200	PSI	3.300	.9825	.9528	
IMR 4451	51.7	3.69	LDPM	3.70	2574	55.6	2752	59600	PSI	3.300	.9829	.9604	
IMR4831	53.0	3.90	LDPM	3.70	2563	56.8	2749	57100	PSI	3.300	.9816	.9517	
H414	50.0	3.31	LDPM	3.10	2528	55.5	2743	58440	PSI	3.300	.9852	.9613	
WIN 760	50.0	3.33	LDPM	3.10	2528	55.5	2743	58440	PSI	3.300	.9852	.9613	
HYBRID100	53.0	3.85	LDPM	3.70	2585	57.0	2742	55200	PSI	3.300	.9855	.9606	
ACCUR 2700	48.3	3.31	LDPM	3.10	2517	53.7	2740	59387	PSI	3.305	----	----	
RAM BIG GAME	47.7	3.38	LDPM	3.40	2533	53.0	2736	59804	PSI	3.305	----	----	
IMR 4007 SSC	52.7	3.82	LDPM	3.70	2698	53.5	2732	58100	PSI	3.300	----	----	
IMR 4166	45.5	3.37	LDPM	3.40	2575	48.8	2724	58800	PSI	3.300	.9830	.9567	
RELODER22	54.6	3.80	LDPM	3.70	2427	62.0	2721	NA	NA	3.160	----	----	
NORMA 203B	48.0	3.46	LDPM	3.40	2493	50.5	2720	NA	NA	3.189	----	----	
H4831	54.0	3.91	LDPM	3.70	2447	60.0	2710	53160	PSI	3.300	.9831	.9601	
IMR4064	45.5	3.39	LDPM	3.40	2550	48.7	2700	58200	PSI	3.300	.9822	.9470	
ACCUR 4064	44.0	3.32	LDPM	3.10	2476	48.9	2688	59336	PSI	3.305	----	----	
IMR 7977	58.3	4.12	LDPM	4.00	2513	62.0c	2686	56600	PSI	3.300	.9822	.9548	
H380	48.0	3.32	LDPM	3.10	2490	53.0	2682	58440	PSI	3.300	.9853	.9608	
IMR4895	45.0	3.28	LDPM	3.10	2555	48.0	2680	56800	PSI	3.300	.9842	.9552	
ACCUR 4350	50.3	3.72	LDPM	3.70	2407	55.9	2678	51663	PSI	3.220	----	----	
SUPRM780	57.3	3.92	LDPM	3.70	2545	61.0	2673	54100	PSI	3.300	.9869	.9643	
H-VARGET	44.0	3.22	LDPM	3.10	2533	47.0	2668	60000	PSI	3.300	.9826	.9428	
IMR4320	45.0	3.22	LDPM	3.10	2525	47.8	2661	58000	PSI	3.300	.9812	.9477	
BENCHMARK	43.0	3.07	LDPM	3.10	2550	46.0	2660	58800	PSI	3.300	.9859	.9763	

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR		
											VELOCITY	PRESSURE	
180 Grain Jacketed Bullet													
NORMA MRP	55.0	3.89	LDPM	3.70	2559	57.9	2654	NA	NA	3.228	----	----	
RELODER19	51.9	3.67	LDPM	3.70	2354	59.0	2640	NA	NA	3.160	----	----	
H4895	41.0	2.98	LDPM	2.80	2427	46.0	2638	58560	PSI	3.300	.9835	.9517	
BL-C(2)	44.0	2.84	LDPM	2.80	2456	48.5	2634	57720	PSI	3.300	.9845	.9556	
H335	42.0	2.71	LDPM	2.50	2455	46.0	2621	59040	PSI	3.300	.9838	.9606	
180 Grain Solid Bullet													
v-N550	49.4	3.42	LDPM	3.40	2470	54.0	2723	NA	NA	3.165	----	----	
v-N560	53.2	3.67	LDPM	3.70	2405	59.7	2720	NA	NA	3.165	----	----	
v-N160	52.5	3.85	LDPM	3.70	2510	55.9	2687	NA	NA	3.165	----	----	
v-N150	42.4	3.16	LDPM	3.10	2352	48.3	2589	NA	NA	3.165	----	----	
v-N140	42.7	3.13	LDPM	3.10	2274	48.3	2572	NA	NA	3.165	----	----	
180 Grain Barnes X Solid Bullet													
R HUNTER	52.3	3.49	LDPM	3.40	2588	58.1	2821	59470	PSI	3.340	----	----	
ACCUR 2700	47.5	3.25	LDPM	3.10	2467	52.7	2710	59393	PSI	3.340	----	----	
RAM BIG GAME	47.1	3.33	LDPM	3.10	2464	52.3	2701	59224	PSI	3.340	----	----	
ACCUR 4064	44.9	3.39	LDPM	3.40	2453	49.9	2697	59631	PSI	3.340	----	----	
ACCUR 4350	49.9	3.69	LDPM	3.70	2425	55.5	2643	52000	PSI	3.340	----	----	
v-N160	48.5	3.56	LDPM	3.40	2336	54.6	2598	NA	NA	3.217	----	----	
v-N550	44.6	3.09	LDPM	3.10	2329	49.4	2585	NA	NA	3.217	----	----	
v-N150	41.1	3.07	LDPM	3.10	2188	48.5	2549	NA	NA	3.307	----	----	
185 Grain Jacketed Bullet													
R HUNTER	52.4	3.49	LDPM	3.40	2584	58.2	2815	59781	PSI	3.340	----	----	
ACCUR 4350	52.0	3.85	LDPM	3.70	2503	57.7	2757	57006	PSI	3.340	----	----	
ACCUR 2700	48.4	3.31	LDPM	3.10	2498	53.7	2727	59238	PSI	3.340	----	----	
v-N560	54.0	3.73	LDPM	3.70	2418	60.0	2710	NA	NA	3.130	----	----	
RAM BIG GAME	47.4	3.36	LDPM	3.10	2499	52.7	2710	59364	PSI	3.340	----	----	
ACCUR 4064	44.5	3.36	LDPM	3.10	2464	49.4	2683	59459	PSI	3.340	----	----	
v-N160	52.2	3.83	LDPM	3.70	2425	57.2	2674	NA	NA	3.130	----	----	
v-N550	46.6	3.23	LDPM	3.10	2300	51.8	2598	NA	NA	3.307	----	----	
v-N150	44.4	3.31	LDPM	3.10	2283	50.3	2552	NA	NA	3.307	----	----	
v-N540	44.1	3.09	LDPM	3.10	2257	48.8	2530	NA	NA	3.307	----	----	
190 Grain Jacketed Bullet													
R HUNTER	51.4	3.43	LDPM	3.40	2537	57.1	2769	59741	PSI	3.340	----	----	
v-N560	55.1	3.80	LDPM	3.70	2365	62.3	2707	NA	NA	3.307	----	----	
H4350	51.0	3.70	LDPM	3.70	2451	56.5	2692	59040	PSI	3.220	.9831	.9608	
RAM BIG GAME	47.5	3.36	LDPM	3.40	2463	52.8	2689	59556	PSI	3.230	----	----	
ACCUR 2700	47.6	3.26	LDPM	3.10	2431	52.9	2673	59116	PSI	3.230	----	----	
H4831	57.0	4.13	LDPM	4.00	2514	61.0c	2668	60000	PSI	3.220	.9851	.9691	
v-N550	47.4	3.28	LDPM	3.10	2323	53.9	2664	NA	NA	3.307	----	----	
ACCUR 4350	50.2	3.71	LDPM	3.70	2404	55.7	2655	54891	PSI	3.230	----	----	
ACCUR 4064	44.5	3.36	LDPM	3.10	2427	49.5	2649	59478	PSI	3.230	----	----	
IMR4350	51.0	3.75	LDPM	3.70	2466	54.5	2647	58500	PSI	3.220	.9800	.9405	
IMR7828	55.0	3.99	LDPM	4.00	2429	59.8	2646	58700	PSI	3.220	.9823	.9513	
WIN 760	48.0	3.20	LDPM	3.10	2398	53.0	2640	59400	PSI	3.220	.9809	.9980	
H414	48.0	3.17	LDPM	3.10	2398	53.0	2640	59400	PSI	3.220	.9809	.9534	
IMR4831	51.0	3.75	LDPM	3.70	2445	55.0	2639	57000	PSI	3.220	.9809	.9493	
HYBRID100	49.0	3.56	LDPM	3.40	2456	53.5	2639	58300	PSI	3.220	.9842	.9633	
SUPRM780	56.2	3.85	LDPM	3.70	2512	59.8	2628	59000	PSI	3.220	.9875	.9671	

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
190 Grain Jacketed Bullet												
IMR 4451	49.9	3.56	LDPM	3.40	2453	53.7	2615	59400	PSI	3.220	.9834	.9631
H-VARGET	43.5	3.18	LDPM	3.10	2450	46.5	2608	59640	PSI	3.220	.9795	.9439
v-N160	52.8	3.88	LDPM	3.70	2375	58.8	2608	NA	NA	3.307	----	----
IMR 4166	43.9	3.25	LDPM	3.10	2431	47.0	2608	59200	PSI	3.220	.9774	.9402
IMR 4007 SSC	46.0	3.33	LDPM	3.10	2389	50.5	2598	58100	PSI	3.220	.9816	.9526
IMR4064	45.0	3.35	LDPM	3.10	2485	47.7	2593	57600	PSI	3.220	.9845	.9552
IMR 7977	57.5	4.07	LDPM	4.00	2432	61.2	2591	57700	PSI	3.220	.9827	.9599
H380	47.0	3.25	LDPM	3.10	2369	51.5	2555	58440	PSI	3.220	.9832	.9620
H4895	41.0	2.98	LDPM	2.80	2380	45.5	2525	57600	PSI	3.220	.9869	.9677
v-N150	44.7	3.33	LDPM	3.10	2280	49.4	2516	NA	NA	3.307	----	----
BL-C(2)	43.0	2.77	LDPM	2.80	2312	47.0	2510	58320	PSI	3.220	.9797	.9477
H335	40.0	2.58	LDPM	2.50	2271	44.0	2465	58080	PSI	3.220	.9796	.9547
200 Grain Jacketed Bullet												
R HUNTER	50.8	3.39	LDPM	3.40	2467	56.4	2688	59810	PSI	3.314	----	----
ACCUR 4350	49.7	3.68	LDPM	3.70	2411	55.2	2637	59444	PSI	3.314	----	----
v-N560	52.0	3.59	LDPM	3.40	2310	58.6	2608	NA	NA	3.130	----	----
ACCUR 2700	46.3	3.17	LDPM	3.10	2388	51.4	2597	59901	PSI	3.314	----	----
WIN 760	48.0	3.20	LDPM	3.10	2413	51.5	2579	59280	PSI	3.300	.9812	.9605
H414	48.0	3.17	LDPM	3.10	2413	51.5	2579	59280	PSI	3.300	.9812	.9605
H4831	54.0	3.91	LDPM	3.70	2436	57.5	2577	59280	PSI	3.230	.9839	.9624
NORMA MRP	53.0	3.75	LDPM	3.70	2448	55.7	2569	NA	NA	3.189	----	----
RAM BIG GAME	45.1	3.19	LDPM	3.10	2362	50.1	2563	59294	PSI	3.314	----	----
IMR7828	53.0	3.84	LDPM	3.70	2323	58.0	2559	58100	PSI	3.300	.9807	.9502
SUPRM780	53.6	3.67	LDPM	3.70	2367	57.0	2555	58500	PSI	3.300	.9778	.9353
RELODER 17	44.9	3.13	LDPM	3.10	2276	51.0	2552	NA	NA	3.250	----	----
IMR4831	51.0	3.75	LDPM	3.70	2375	54.2	2550	56800	PSI	3.300	.9778	.9400
IMR4350	50.0	3.67	LDPM	3.70	2364	53.5	2550	57200	PSI	3.300	.9784	.9391
H4350	50.0	3.63	LDPM	3.40	2431	53.0	2544	58920	PSI	3.230	.9849	.9677
ACCUR 4064	42.6	3.22	LDPM	3.10	2334	47.3	2544	59700	PSI	3.314	----	----
HYBRID100	47.0	3.41	LDPM	3.40	2335	51.5	2532	58600	PSI	3.230	.9821	.9571
v-N550	48.1	3.33	LDPM	3.10	2395	50.6	2516	NA	NA	3.130	----	----
H1000	55.0	3.92	LDPM	3.70	2267	61.0	2510	53280	PSI	3.230	.9831	.9546
v-N160	52.2	3.83	LDPM	3.70	2425	53.7	2503	NA	NA	3.130	----	----
H-VARGET	42.5	3.11	LDPM	3.10	2373	45.5	2501	59520	PSI	3.230	.9824	.9659
RELODER22	51.0	3.56	LDPM	3.40	2228	58.0	2499	NA	NA	3.295	----	----
IMR 4007 SSC	45.0	3.26	LDPM	3.10	2314	49.0	2497	57800	PSI	3.230	.9809	.9521
IMR 7977	54.5	3.85	LDPM	3.70	2321	58.0	2484	58100	PSI	3.230	.9809	.9503
RELODER 25	52.8	3.73	LDPM	3.70	2213	60.0	2481	NA	NA	3.295	----	----
IMR 4166	42.0	3.11	LDPM	3.10	2327	45.2	2476	58900	PSI	3.230	.9807	.9489
IMR 4451	47.2	3.37	LDPM	3.40	2294	50.7	2470	59400	PSI	3.230	.9791	.9498
IMR4064	43.0	3.20	LDPM	3.10	2292	46.0	2469	57400	PSI	3.340	.9755	.9193
H4895	39.0	2.84	LDPM	2.80	2246	43.5	2421	59040	PSI	3.230	.9833	.9587
H380	44.0	3.04	LDPM	2.80	2231	48.0	2395	59520	PSI	3.230	.9825	.9576
v-N150	43.0	3.21	LDPM	3.10	2195	47.5	2375	NA	NA	3.307	----	----
RELODER15	41.4	2.92	LDPM	2.80	2115	47.0	2371	NA	NA	3.295	----	----
RELODER19	48.4	3.42	LDPM	3.40	2082	55.0	2335	NA	NA	3.295	----	----
200 Grain Lead Bullet												
ACCUR 5744	22.0	1.65	LDPM	1.60	1625	22.0	1625	NA	NA	3.250	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
200 Grain Barnes X Solid Bullet												
RAM BIG GAME	48.1	3.41	LDPM	3.40	2418	53.5	2626	59322	PSI	3.218	----	----
ACCUR 2700	46.6	3.19	LDPM	3.10	2374	51.7	2589	59557	PSI	3.218	----	----
R HUNTER	50.7	3.38	LDPM	3.40	2389	56.3	2585	51406	PSI	3.218	----	----
ACCUR 4064	43.4	3.28	LDPM	3.10	2341	48.2	2536	59364	PSI	3.218	----	----
ACCUR 4350	46.3	3.43	LDPM	3.40	2283	51.4	2445	51597	PSI	3.218	----	----
208 Grain A-MAX												
IMR4831	49.9	3.67	LDPM	3.70	2291	54.9	2538	59500	PSI	3.285	.9796	.9502
IMR 7977	57.3	4.05	LDPM	4.00	2364	61.0	2521	57200	PSI	3.285	.9827	.9548
HYBRID100	47.3	3.44	LDPM	3.40	2292	52.0	2519	58300	PSI	3.285	.9801	.9468
H4831	52.1	3.78	LDPM	3.70	2301	58.0	2511	58700	PSI	3.285	.9853	.9633
IMR4350	47.9	3.52	LDPM	3.40	2259	52.7	2503	58600	PSI	3.285	.9787	.9465
H4350	47.6	3.45	LDPM	3.40	2303	52.4	2499	59600	PSI	3.285	.9831	.9542
IMR 4007 SSC	46.4	3.36	LDPM	3.40	2269	51.0	2498	60000	PSI	3.285	.9791	.9439
IMR 4166	42.4	3.14	LDPM	3.10	2341	45.4	2495	59200	PSI	3.285	.9788	.9357
SUPRM780	52.2	3.57	LDPM	3.40	2314	56.8	2476	54000	PSI	3.285	.9852	.9698
H414	46.1	3.05	LDPM	2.80	2307	49.6	2467	58300	PSI	3.285	.9811	.9532
WIN 760	46.1	3.07	LDPM	3.10	2307	49.6	2467	58300	PSI	3.285	.9811	.9532
IMR7828	52.2	3.78	LDPM	3.70	2239	57.0	2442	53100	PSI	3.285	.9819	.9598
H380	45.5	3.14	LDPM	3.10	2231	49.5	2427	57300	PSI	3.285	.9791	.9445
H-VARGET	40.9	2.99	LDPM	2.80	2226	45.0	2415	59200	PSI	3.285	.9802	.9497
IMR4064	42.5	3.17	LDPM	3.10	2250	45.5	2404	57000	PSI	3.285	.9782	.9404
H4895	38.9	2.83	LDPM	2.80	2203	43.2	2362	57400	PSI	3.285	.9838	.9625
208 Grain Jacketed Bullet												
R HUNTER	49.6	3.31	LDPM	3.10	2381	55.1	2601	59658	PSI	3.340	----	----
ACCUR 4350	49.2	3.64	LDPM	3.40	2237	54.7	2522	56229	PSI	3.340	----	----
ACCUR 2700	44.9	3.07	LDPM	3.10	2246	49.8	2506	59766	PSI	3.340	----	----
RAM BIG GAME	44.4	3.14	LDPM	3.10	2284	49.4	2500	60000	PSI	3.340	----	----
ACCUR 4064	43.1	3.25	LDPM	3.10	2261	47.9	2494	59769	PSI	3.340	----	----
210 Grain Jacketed Bullet												
R HUNTER	49.5	3.30	LDPM	3.10	2384	55.0	2594	59142	PSI	3.340	----	----
ACCUR 4350	48.2	3.57	LDPM	3.40	2324	53.6	2541	59268	PSI	3.340	----	----
ACCUR 2700	44.5	3.05	LDPM	2.80	2293	49.5	2496	59366	PSI	3.340	----	----
RAM BIG GAME	44.3	3.14	LDPM	3.10	2292	49.3	2491	59624	PSI	3.340	----	----
ACCUR 4064	41.7	3.15	LDPM	3.10	2259	46.4	2458	59565	PSI	3.340	----	----
220 Grain Jacketed Bullet												
v-N560	53.5	3.69	LDPM	3.70	2205	61.3	2516	NA	NA	3.307	----	----
NORMA MRP	53.0	3.75	LDPM	3.70	2326	55.6	2500	NA	NA	3.228	----	----
IMR7828	53.0	3.84	LDPM	3.70	2288	58.0	2476	59700	PSI	3.230	.9843	.9597
H4831	54.0	3.91	LDPM	3.70	2342	57.5	2458	58320	PSI	3.230	.9861	.9675
SUPRM780	53.6	3.67	LDPM	3.70	2310	57.0	2458	57200	PSI	3.230	.9819	.9486
HYBRID100	47.0	3.41	LDPM	3.40	2258	52.0	2448	58600	PSI	3.230	.9839	.9613
IMR 7977	56.2	3.97	LDPM	4.00	2291	59.8	2445	58500	PSI	3.230	.9821	.9514
IMR4831	50.0	3.67	LDPM	3.70	2275	54.0	2438	57200	PSI	3.230	.9827	.9536
H4350	50.0	3.63	LDPM	3.40	2318	53.0	2435	59040	PSI	3.230	.9835	.9590
IMR4350	49.0	3.60	LDPM	3.40	2287	52.5	2425	57300	PSI	3.230	.9834	.9590
H1000	58.0	4.14	LDPM	4.00	2293	61.0	2412	52320	PSI	3.230	----	----
WIN 760	47.0	3.13	LDPM	3.10	2215	52.0	2408	59400	PSI	3.230	.9833	.9534
H414	47.0	3.11	LDPM	3.10	2215	52.0	2408	59400	PSI	3.230	.9833	.9534

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

30-06 SPRINGFIELD

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L	1 GRAIN FACTOR	
											VELOCITY	PRESSURE
220 Grain Jacketed Bullet												
H-VARGET	42.0	3.07	LDPM	3.10	2279	45.0	2382	59280	PSI	3.230	.9853	.9622
IMR 4166	42.2	3.13	LDPM	3.10	2235	45.2	2380	58800	PSI	3.230	.9791	.9430
v-N160	50.8	3.73	LDPM	3.70	2146	56.0	2369	NA	NA	3.307	----	----
IMR4064	43.0	3.20	LDPM	3.10	2241	45.5	2325	56700	PSI	3.230	----	----
225 Grain Jacketed Bullet												
R HUNTER	47.1	3.14	LDPM	3.10	2232	52.4	2461	59394	PSI	3.340	----	----
ACCUR 4350	48.2	3.57	LDPM	3.40	2167	53.6	2413	57015	PSI	3.340	----	----
ACCUR 2700	43.9	3.01	LDPM	2.80	2146	48.8	2399	60000	PSI	3.340	----	----
ACCUR 4064	41.7	3.15	LDPM	3.10	2156	46.3	2371	59444	PSI	3.340	----	----
RAM BIG GAME	42.8	3.03	LDPM	2.80	2142	47.6	2357	59238	PSI	3.340	----	----

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 04-15-2016 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available