


357 MAGNUM

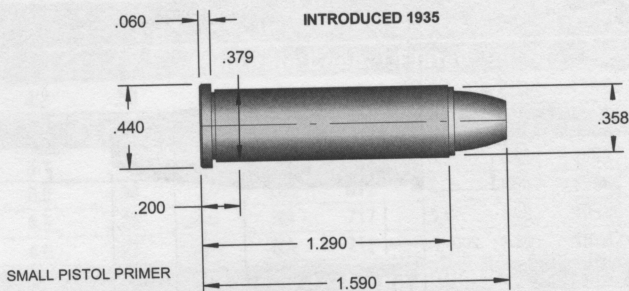

LEE SHELL HOLDER 1

Useful case capacity 1.36 cc

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
90 Grain Lead Bullet										
IMR TRAIL BOS	3.5	.76	.76	0.70	969	5.0	1121	10700	CUP	1.560
TITEGROUP	3.0	.25	LDPM	NA	850	4.0	1107	9000	CUP	1.560
CLAYS	2.7	.39	.37	NA	780	3.5	1106	12500	CUP	1.560
110 Grain Jacketed Bullet										
BLUE DOT	14.1	1.22	1.18	NA	1498	16.0c	1680	NA	NA	1.575
HERC 2400	17.2	1.27	1.26	NA	1489	19.5c	1670	NA	NA	1.575
ACCUR #7	11.6	.76	.76	0.70	1362	12.9	1548	32526	PSI	1.575
ACCUR #5	9.9	.62	.61	NA	1355	11.0	1540	32448	PSI	1.575
POWER PISTOL	9.2	.82	.82	0.70	1293	10.5	1451	NA	NA	1.575
UNIQUE	8.5	.93	.88	NA	1291	9.7	1447	NA	NA	1.575
BULLSEYE	7.7	.81	.76	0.70	1252	8.7	1403	NA	NA	1.575
110 Grain XTP										
WIN 296	22.0c	1.44	1.36	1.30	1992	23.0c	2078	37200	CUP	1.590
H110	22.0c	1.44	1.36	1.30	1992	23.0c	2078	37200	CUP	1.590
v-N110	18.5c	1.54	LDPM	NA	1716	20.8c	2006	NA	NA	1.575
H4227	18.9c	1.45	1.36	1.30	1774	21.0c	1900	35500	CUP	1.590
LONGSHOT	9.5	.78	.76	0.70	1676	10.5	1800	42400	CUP	1.590
HS6	10.3	.73	.71	0.70	1614	11.5	1776	42300	CUP	1.590
v-3N37	10.5	.96	.95	NA	1627	11.3	1701	NA	NA	1.575
v-N350	10.6	1.04	1.02	1.00	1631	11.2	1697	NA	NA	1.575
ACCUR #9	15.3	1.01	.95	1.00	1478	16.9	1677	34086	PSI	1.575
WIN 231	8.0	.74	.71	0.70	1541	9.0	1652	42500	CUP	1.590
HP38	8.0	.74	.71	0.70	1541	9.0	1652	42500	CUP	1.590
CFE PISTOL	7.3	.55	.53	0.50	1452	8.5	1641	33000	PSI	1.590
v-N340	9.3	.99	.95	1.00	1558	9.8	1639	NA	NA	1.575
R TRUE BLUE	11.3	.77	.76	0.70	1475	12.5	1639	33160	PSI	1.570
AUTOCOMP	7.7	.61	.61	NA	1483	8.6	1631	32900	PSI	1.590
TITEGROUP	7.2	.61	.61	NA	1509	8.0	1614	41500	CUP	1.590
SR4756	6.5	.71	.71	0.70	1292	8.5	1574	32700	PSI	1.590
IMR 700X	5.0	.67	.66	NA	1254	7.0	1556	30600	PSI	1.590
SR7625	6.0	.63	.61	NA	1272	8.2	1544	33600	PSI	1.590

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

357 MAGNUM

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY FPS	NEVER EXCEED	VELOCITY FPS	PRESS	UNITS	MIN OAL
110 Grain XTP										
UNIVERSAL	7.5	.82	.82	NA	1465	8.0	1536	40000	CUP	1.590
RAM ZIP	7.7	.63	.61	NA	1373	8.6	1525	32080	PSI	1.578
v-N320	7.9	.96	.95	NA	1460	8.3	1516	NA	NA	1.575
IMR PB	4.5	.54	.53	0.50	1087	6.5	1418	32200	PSI	1.590
v-N310	6.6	.80	.76	0.70	1355	7.0	1402	NA	NA	1.575
ACCUR #2	7.2	.60	.57	NA	1227	8.4	1374	34854	PSI	1.570
124 Grain Lead Bullet										
v-N110	17.1c	1.42	1.36	1.30	1673	18.3c	1775	NA	NA	1.614
v-N350	9.1	.89	.88	NA	1463	9.8	1524	NA	NA	1.614
v-N340	8.6	.92	.88	NA	1453	9.2	1516	NA	NA	1.614
125 Grain Jacketed Bullet										
ACCUR #9	14.1	.93	.88	NA	1378	15.6	1567	34998	PSI	1.575
RAM ZIP	7.1	.58	.57	0.50	1276	7.9	1418	30680	PSI	1.578
125 Grain Lead Bullet										
CFE PISTOL	6.6	.50	.49	0.50	1375	7.6	1514	27900	PSI	1.580
AUTOCOMP	6.5	.51	.49	0.50	1311	7.5	1456	27500	PSI	1.580
R TRUE BLUE	7.7	.53	.53	0.50	1246	9.1	1414	34872	PSI	1.575
UNIVERSAL	4.8	.53	.53	0.50	1046	6.8	1401	34200	CUP	1.580
SR4756	5.0	.55	.53	0.50	1034	7.0	1378	24500	PSI	1.580
SR7625	5.0	.52	.49	0.50	1110	6.5	1339	24000	PSI	1.580
IMR PB	4.0	.48	.46	NA	1034	6.0	1325	29900	PSI	1.580
IMR 700X	4.0	.54	.53	0.50	1069	5.5	1311	21800	PSI	1.580
ACCUR #2	6.4	.54	.53	0.50	1178	7.6	1307	34966	PSI	1.575
RAM ZIP	6.0	.49	.49	NA	1142	7.0	1294	34968	PSI	1.575
TITEGROUP	4.0	.34	.34	0.30	1055	5.4	1274	22800	CUP	1.580
CLAYS	3.5	.51	.49	0.50	984	5.3	1260	33000	CUP	1.580
SOLO 1000	5.9	.79	.76	0.70	1112	7.0	1236	34982	PSI	1.575
WIN 231	4.6	.43	.43	NA	1052	5.5	1185	18800	CUP	1.580
HP38	4.6	.43	.43	NA	1052	5.5	1185	18800	CUP	1.580
125 Grain Copper Plated										
ACCUR #5	8.4	.52	.49	0.50	1238	9.9	1393	34750	PSI	1.560
ACCUR #2	6.7	.56	.53	0.50	1125	7.9	1270	34303	PSI	1.560
RAM ZIP	6.2	.51	.49	0.50	1097	7.3	1263	34785	PSI	1.560
SOLO 1000	6.3	.84	.82	NA	1077	7.4	1213	34187	PSI	1.560
125 Grain XTP										
WIN 296	21.0c	1.38	1.36	1.30	1881	22.0c	1966	41400	CUP	1.590
H110	21.0c	1.38	1.36	1.30	1881	22.0c	1966	41400	CUP	1.590
H4227	18.0c	1.38	1.36	1.30	1692	20.0c	1839	42000	CUP	1.590
v-N110	16.8c	1.40	1.36	1.30	1601	18.4c	1772	NA	NA	1.575
R ENFORCER	16.2	1.12	1.09	1.00	1500	18.0	1667	32570	PSI	1.580
LONGSHOT	8.7	.72	.71	0.70	1529	9.7	1647	42000	CUP	1.590
HS6	9.8	.70	.66	0.70	1493	10.9	1629	42100	CUP	1.590
v-N350	9.6	.94	.88	NA	1496	10.2	1561	NA	NA	1.575
v-N340	8.6	.92	.88	NA	1444	9.3	1517	NA	NA	1.575
WIN 231	7.3	.68	.66	NA	1335	8.5	1514	42700	CUP	1.590
HP38	7.3	.68	.66	NA	1335	8.5	1514	42700	CUP	1.590
TITEGROUP	6.8	.58	.57	0.50	1425	7.5	1497	41200	CUP	1.590
CFE PISTOL	6.9	.52	.49	0.50	1340	8.0	1480	32500	PSI	1.590

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

357 MAG

357 MAGNUM

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
125 Grain XTP										
R TRUE BLUE	10.4	.71	.71	0.70	1325	11.5	1472	30750	PSI	1.580
AUTOCOMP	7.5	.59	.57	NA	1352	8.2	1455	31700	PSI	1.590
UNIVERSAL	7.1	.78	.76	0.70	1394	7.6	1453	39600	CUP	1.590
ACCUR #7	10.9	.71	.71	0.70	1278	12.1	1453	33306	PSI	1.575
ACCUR #5	9.6	.60	.57	NA	1273	10.6	1446	33384	PSI	1.575
SR4756	6.0	.66	.66	NA	1169	7.8	1427	30600	PSI	1.590
HERC 2400	15.4	1.14	1.09	1.00	1257	17.5	1409	NA	NA	1.580
SR7625	5.8	.61	.61	NA	1178	7.5	1401	33800	PSI	1.590
IMR 700X	4.5	.60	.57	NA	1093	6.4	1399	30400	PSI	1.590
v-N320	6.9	.83	.82	NA	1312	7.5	1379	NA	NA	1.575
POWER PISTOL	9.2	.82	.82	0.70	1199	10.5	1345	NA	NA	1.580
UNIQUE	8.4	.92	.88	NA	1197	9.6	1343	NA	NA	1.580
v-N310	6.0	.73	.71	0.70	1217	6.4	1284	NA	NA	1.575
IMR PB	4.5	.54	.53	0.50	1053	5.9	1263	32900	PSI	1.590
ACCUR #2	6.8	.57	.57	0.50	1096	8.0	1248	34854	PSI	1.575
125 Grain Barnes X Solid Bullet										
R ENFORCER	14.9	1.03	1.02	1.00	1575	16.5	1750	34500	PSI	1.585
ACCUR #9	12.6	.83	.82	NA	1399	14.0	1554	33300	PSI	1.585
ACCUR #7	9.0	.59	.57	0.50	1220	10.0	1355	34000	PSI	1.585
ACCUR #5	7.5	.47	.46	NA	1166	8.3	1295	34000	PSI	1.585
R TRUE BLUE	7.0	.48	.46	NA	1109	7.8	1232	33500	PSI	1.585
130 Grain Lead Bullet										
CFE PISTOL	6.3	.47	.46	NA	1300	7.7	1497	26700	PSI	1.580
AUTOCOMP	6.0	.47	.46	NA	1216	7.3	1392	25000	PSI	1.580
SR4756	5.5	.60	.57	NA	1116	6.7	1322	22800	PSI	1.580
SR7625	4.8	.50	.49	0.50	1075	6.3	1301	25300	PSI	1.580
IMR 700X	4.0	.54	.53	0.50	1059	5.5	1299	24800	PSI	1.580
IMR PB	4.0	.48	.46	NA	1028	5.7	1268	29600	PSI	1.580
135 Grain Lead Bullet										
UNIVERSAL	4.8	.53	.53	0.50	986	6.5	1314	27800	CUP	1.580
CLAYS	3.4	.50	.49	0.50	914	5.1	1207	30200	CUP	1.580
TITEGROUP	3.5	.30	LDPM	0.30	906	5.2	1186	24500	CUP	1.580
WIN 231	4.1	.38	.37	NA	946	5.3	1027	19400	CUP	1.580
HP38	4.1	.38	.37	NA	946	5.3	1027	19400	CUP	1.580
135 Grain XTP										
HERC 2400	14.1	1.04	1.02	1.00	1228	16.0	1377	NA	NA	1.590
POWER PISTOL	8.4	.75	.71	0.70	1152	9.6	1291	NA	NA	1.590
UNIQUE	6.9	.75	.71	0.70	1057	7.8	1185	NA	NA	1.590
140 Grain Jacketed Bullet										
v-N110	15.7	1.31	1.26	1.30	1499	17.1c	1647	NA	NA	1.575
H110	12.0	.79	.76	0.70	1405	14.5	1607	31100	PSI	1.600
R ENFORCER	14.4	1.00	.95	1.00	1311	16.0	1457	34200	PSI	1.580
v-3N37	9.1	.83	.82	NA	1368	9.8	1440	NA	NA	1.575
v-N350	8.9	.87	.82	NA	1365	9.5	1433	NA	NA	1.575
ACCUR #9	12.8	.84	.82	NA	1252	14.2	1422	33618	PSI	1.575
R TRUE BLUE	9.3	.64	.61	NA	1250	10.3	1389	33580	PSI	1.575
v-N340	8.2	.87	.82	NA	1325	8.7	1385	NA	NA	1.575
ACCUR #5	9.1	.57	.57	0.50	1202	10.1	1366	33696	PSI	1.575

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
140 Grain Jacketed Bullet										
LONGSHOT	5.5	.45	.43	NA	1091	7.0	1358	33800	PSI	1.600
ACCUR #7	10.1	.66	.66	NA	1178	11.2	1339	34008	PSI	1.575
CFE PISTOL	5.4	.41	.40	NA	1110	6.6	1328	32200	PSI	1.600
HS6	6.0	.43	.43	NA	1046	7.7	1326	33400	PSI	1.600
BLUE DOT	10.1	.88	.88	NA	1181	11.5	1324	NA	NA	1.560
IMR4227	11.0	.85	.82	NA	1176	13.0	1320	33000	PSI	1.600
HERC 2400	13.3	.99	.95	NA	1158	15.1	1298	NA	NA	1.560
POWER PISTOL	8.4	.74	.71	0.70	1149	9.5	1288	NA	NA	1.560
AUTOCOMP	5.0	.39	.37	NA	1038	6.3	1279	33200	PSI	1.600
TITEGROUP	3.5	.30	LDPM	0.30	895	5.0	1213	33800	PSI	1.600
UNIVERSAL	4.0	.44	.43	NA	922	5.3	1205	34200	PSI	1.600
IMR 700X	3.5	.47	.46	NA	849	5.2	1205	31900	PSI	1.600
UNIQUE	7.0	.77	.76	0.70	1057	8.0	1185	NA	NA	1.560
140 Grain Lead Bullet										
CFE PISTOL	3.4	.26	LDPM	NA	711	4.1	904	9900	PSI	1.550
UNIVERSAL	3.3	.36	.34	NA	767	3.9	902	10600	PSI	1.550
TITEGROUP	2.7	.23	LDPM	NA	782	3.2	899	10800	PSI	1.550
WIN 231	2.9	.27	LDPM	NA	718	3.7	897	11200	PSI	1.550
HP38	2.9	.27	LDPM	NA	718	3.7	897	11200	PSI	1.550
IMR 700X	2.6	.35	.34	0.30	769	3.2	892	11900	PSI	1.550
AUTOCOMP	3.6	.28	LDPM	NA	793	4.3	883	9900	PSI	1.550
140 Grain XTP										
WIN 296	17.1	1.12	1.09	1.00	1597	19.0	1762	40900	CUP	1.590
H110	17.1	1.12	1.09	1.00	1597	19.0	1762	40900	CUP	1.590
H4227	16.2	1.25	1.18	NA	1541	18.0c	1685	42600	CUP	1.590
HS6	9.5	.68	.66	NA	1411	10.5	1539	43000	CUP	1.590
LONGSHOT	8.0	.66	.66	NA	1396	9.1	1534	41000	CUP	1.590
WIN 231	6.5	.61	.61	NA	1219	7.7	1378	41900	CUP	1.590
HP38	6.5	.60	.57	NA	1219	7.7	1378	41900	CUP	1.590
TITEGROUP	6.3	.53	.53	0.50	1262	7.0	1376	41900	CUP	1.590
CFE PISTOL	6.1	.46	.46	NA	1149	7.5	1347	33000	PSI	1.590
AUTOCOMP	6.5	.51	.49	0.50	1164	7.6	1346	32400	PSI	1.590
SR4756	5.3	.58	.57	0.50	974	7.3	1307	31300	PSI	1.590
UNIVERSAL	6.5	.71	.71	0.70	1218	7.0	1299	40200	CUP	1.590
IMR 700X	4.0	.54	.53	0.50	927	6.0	1267	30000	PSI	1.590
SR7625	5.5	.58	.57	0.50	1079	6.7	1249	31300	PSI	1.590
ACCUR #2	6.2	.52	.49	0.50	992	7.3	1126	34728	CUP	1.575
IMR PB	4.5	.54	.53	0.50	966	5.4	1122	29800	PSI	1.590
140 Grain Barnes X Solid Bullet										
R ENFORCER	13.1	.91	.88	NA	1377	14.5	1530	34000	PSI	1.590
ACCUR #9	11.3	.74	.71	0.70	1204	12.5	1338	33700	PSI	1.590
ACCUR #7	8.6	.56	.53	0.50	1060	9.5	1178	34500	PSI	1.590
ACCUR #5	6.9	.43	.43	NA	1032	7.7	1147	33600	PSI	1.590
ACCUR #2	5.4	.45	.43	NA	803	6.3	914	34761	PSI	1.590
145 Grain Lead Bullet										
v-N110	15.1	1.26	1.26	NA	1572	16.0	1649	NA	NA	1.614
v-3N37	8.3	.76	.76	0.70	1352	9.0	1418	NA	NA	1.614
v-N350	7.9	.77	.76	0.70	1325	8.7	1401	NA	NA	1.614
v-N340	7.3	.78	.76	0.70	1306	7.7	1360	NA	NA	1.614

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
145 Grain Lead Bullet										
v-N320	6.3	.76	.76	0.70	1234	6.7	1281	NA	NA	1.614
146 Grain Jacketed Bullet										
WIN 296	15.5	1.02	1.02	1.00	1512	17.2	1691	42600	CUP	1.535
H110	15.5	1.02	1.02	1.00	1512	17.2	1691	42600	CUP	1.535
H4227	14.5	1.12	1.09	1.00	1440	16.0	1566	42700	CUP	1.535
LONGSHOT	7.5	.62	.61	NA	1358	8.6	1483	42600	CUP	1.535
HS6	8.5	.61	.61	NA	1330	9.5	1461	41800	CUP	1.535
CFE PISTOL	6.0	.45	.43	NA	1157	6.9	1338	32600	PSI	1.535
WIN 231	6.0	.56	.53	0.50	1176	7.1	1330	42200	CUP	1.535
HP38	6.0	.56	.53	0.50	1176	7.1	1330	42200	CUP	1.535
TITEGROUP	5.9	.50	.49	0.50	1223	6.6	1317	42900	CUP	1.535
AUTOCOMP	6.4	.50	.49	0.50	1193	7.1	1288	32300	PSI	1.535
UNIVERSAL	6.0	.66	.66	NA	1160	6.5	1261	39900	CUP	1.535
IMR 700X	4.5	.60	.57	NA	1025	5.7	1233	30300	PSI	1.535
SR4756	4.5	.49	.49	0.50	833	6.5	1218	27700	PSI	1.535
SR7625	4.0	.42	.40	NA	841	6.0	1183	30000	PSI	1.535
IMR PB	3.5	.42	.40	NA	804	4.7	1035	30100	PSI	1.535
147 Grain Lead Bullet										
ACCUR #9	11.9	.78	.76	0.70	1151	13.2	1308	32838	PSI	1.580
ACCUR #7	9.5	.62	.61	NA	1085	10.5	1234	34320	PSI	1.580
148 Grain Wad Cutter										
CFE PISTOL	3.6	.27	LDPM	NA	927	4.5	1085	23000	PSI	1.290
AUTOCOMP	4.0	.31	.30	0.30	943	4.7	1064	24300	PSI	1.290
SR4756	3.8	.42	.40	NA	860	4.5	1008	20000	PSI	1.290
UNIVERSAL	3.5	.38	.37	NA	880	4.0	989	17700	CUP	1.290
IMR 700X	3.0	.40	.40	NA	892	3.5	989	22300	PSI	1.290
SR7625	3.5	.37	.37	NA	868	4.1	976	20400	PSI	1.290
IMR PB	3.0	.36	.34	NA	848	3.7	958	23500	PSI	1.290
TITEGROUP	2.9	.25	LDPM	NA	830	3.3	909	18900	CUP	1.290
WIN 231	3.0	.28	LDPM	NA	845	3.4	908	17600	CUP	1.290
HP38	3.0	.28	LDPM	NA	845	3.4	908	17600	CUP	1.290
158 Grain Jacketed Bullet										
v-N110	15.1	1.26	1.26	NA	1480	15.9	1569	NA	NA	1.575
ACCUR #7	9.5	.62	.61	NA	1196	10.5	1360	34242	PSI	1.580
v-N350	8.3	.81	.76	0.70	1263	8.9	1314	NA	NA	1.575
v-3N37	8.2	.75	.71	0.70	1237	8.8	1305	NA	NA	1.575
v-N340	7.3	.78	.76	0.70	1184	7.7	1239	NA	NA	1.575
RAM ZIP	6.0	.49	.49	NA	1105	6.7	1228	31680	PSI	1.580
v-N320	6.2	.75	.71	0.70	1099	6.6	1160	NA	NA	1.575
ACCUR #2	5.9	.49	.49	0.50	889	6.9	1015	34813	PSI	1.575
158 Grain Lead Bullet										
CFE PISTOL	5.3	.40	.40	NA	1123	6.6	1321	28500	PSI	1.620
RAM ZIP	6.3	.51	.49	0.50	1176	7.0	1307	30560	PSI	1.590
R TRUE BLUE	8.8	.60	.57	NA	1176	9.8	1307	32210	PSI	1.590
ACCUR #9	11.2	.74	.71	0.70	1104	12.4	1255	32214	PSI	1.580
UNIVERSAL	4.0	.44	.43	NA	890	6.2	1247	33400	CUP	1.610
AUTOCOMP	5.0	.39	.37	NA	1025	6.5	1237	27000	PSI	1.620
ACCUR #5	8.0	.50	.49	0.50	1100	9.0	1220	34500	PSI	1.590

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
158 Grain Lead Bullet										
SR4756	5.0	.55	.53	0.50	968	6.5	1214	27600	PSI	1.620
SR7625	4.5	.47	.46	NA	965	6.1	1186	28400	PSI	1.620
ACCUR #7	9.1	.59	.57	NA	1041	10.1	1183	33228	PSI	1.580
IMR 700X	3.4	.46	.46	NA	867	4.9	1137	24400	PSI	1.620
WIN 231	3.4	.32	.32	0.30	796	5.0	1109	23900	CUP	1.610
HP38	3.4	.31	.30	0.30	796	5.0	1109	23900	CUP	1.610
TITEGROUP	4.5	.38	.37	NA	1028	5.0	1108	24900	CUP	1.610
HS6	6.0	.43	.43	NA	990	7.0	1106	15500	CUP	1.610
IMR PB	3.5	.42	.40	NA	845	5.0	1098	28800	PSI	1.620
CLAYS	3.2	.47	.46	NA	867	4.6	1079	33600	CUP	1.610
v-N340	4.5	.48	.46	NA	804	5.9	1050	NA	NA	1.575
UNIQUE	5.3	.58	.57	0.50	922	6.0	1034	NA	NA	1.570
v-N330	3.9	.42	.40	NA	791	5.0	997	NA	NA	1.575
BULLSEYE	4.2	.45	.43	NA	838	4.8	939	NA	NA	1.570
IMR TRAIL BOS	3.2	.69	.66	0.70	754	4.2	865	20400	CUP	1.610
158 Grain Copper Plated										
RAM ZIP	5.5	.45	.43	NA	905	6.5	1057	34766	PSI	1.580
SOLO 1000	5.6	.75	.71	0.70	897	6.5	1013	34967	PSI	1.580
158 Grain XTP										
WIN 296	15.0	.98	.95	NA	1418	16.7	1591	40700	CUP	1.580
H110	15.0	.98	.95	NA	1418	16.7	1591	40700	CUP	1.580
H LIL GUN	16.0	1.08	1.02	1.00	1504	18.0	1577	25800	CUP	1.580
H4227	14.5	1.12	1.09	1.00	1402	16.0	1520	42600	CUP	1.580
v-N105	11.7	1.05	1.02	1.00	1401	12.4	1466	NA	NA	1.575
LONGSHOT	7.3	.60	.57	NA	1258	8.4	1394	43200	CUP	1.580
HS6	8.0	.57	.57	0.50	1182	9.5	1375	41900	CUP	1.580
R ENFORCER	12.5	.87	.82	NA	1206	14.0	1320	34000	PSI	1.590
HERC 2400	13.0	.97	.95	NA	1128	14.8	1265	NA	NA	1.575
R TRUE BLUE	8.6	.59	.57	0.50	1132	9.5	1258	34700	PSI	1.590
ACCUR #5	8.6	.54	.53	0.50	1097	9.7	1256	33150	PSI	1.590
CFF PISTOL	6.1	.46	.46	NA	1107	6.9	1233	33700	PSI	1.580
TITEGROUP	5.4	.46	.46	NA	1135	6.1	1229	41900	CUP	1.580
WIN 231	6.2	.58	.57	0.50	1108	6.9	1220	40000	CUP	1.580
HP38	6.2	.57	.57	0.50	1108	6.9	1220	40000	CUP	1.580
BLUE DOT	9.0	.78	.76	0.70	1060	10.2	1188	NA	NA	1.575
AUTOCOMP	6.2	.49	.49	NA	1058	7.0	1181	33200	PSI	1.580
IMR 700X	4.5	.60	.57	NA	949	5.7	1149	31200	PSI	1.580
SR4756	5.0	.55	.53	0.50	896	6.5	1146	29900	PSI	1.580
UNIVERSAL	5.8	.64	.61	NA	1026	6.3	1133	39300	CUP	1.580
POWER PISTOL	7.5	.67	.66	NA	962	8.5	1078	NA	NA	1.575
SR7625	4.3	.45	.43	NA	812	5.8	1075	29600	PSI	1.580
UNIQUE	6.8	.74	.71	0.70	927	7.7	1040	NA	NA	1.575
IMR PB	3.7	.45	.43	NA	747	4.9	984	31700	PSI	1.580
160 Grain Lead Bullet										
v-N110	14.2	1.18	1.18	NA	1496	15.0	1570	NA	NA	1.575
v-3N37	7.9	.72	.71	0.70	1257	8.4	1321	NA	NA	1.575
v-N350	7.4	.72	.71	0.70	1257	8.1	1309	NA	NA	1.575
v-N340	6.9	.74	.71	0.70	1234	7.4	1276	NA	NA	1.575

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

357 MAGNUM

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
170 Grain Jacketed Bullet										
H LIL GUN	15.0	1.02	1.02	1.00	1422	17.0	1576	35500	CUP	1.580
WIN 296	14.0	.92	.88	NA	1328	15.5	1497	40800	CUP	1.580
H110	14.0	.92	.88	NA	1328	15.5	1497	40800	CUP	1.580
H4227	13.0	1.00	.95	1.00	1272	14.5	1395	41200	CUP	1.580
LONGSHOT	6.8	.56	.53	0.50	1182	7.9	1322	42600	CUP	1.580
HS6	8.0	.57	.57	0.50	1181	9.2	1321	42900	CUP	1.580
TITEGROUP	5.4	.46	.46	NA	1031	6.0	1156	41800	CUP	1.580
ACCUR #7	8.7	.57	.57	0.50	1010	9.7	1147	34788	PSI	1.565
IMR 700X	4.0	.54	.53	0.50	833	5.2	1107	32200	PSI	1.580
SR4756	5.0	.55	.53	0.50	863	6.2	1085	30200	PSI	1.580
SR7625	4.5	.47	.46	NA	808	5.6	1027	31500	PSI	1.580
IMR PB	3.5	.42	.40	NA	670	4.6	920	32100	PSI	1.580
170 Grain XTP										
ALNT 300 MP	15.4	1.03	1.02	1.00	1442	17.5	1620	NA	NA	1.590
R ENFORCER	12.2	.85	.82	NA	1150	13.5	1258	34500	PSI	1.590
HERC 2400	12.8	.95	.95	NA	1040	14.5	1166	NA	NA	1.590
BLUE DOT	8.3	.72	.71	0.70	893	9.4	1002	NA	NA	1.590
180 Grain Jacketed Bullet										
H LIL GUN	13.0	.88	.88	NA	1279	15.0	1422	34500	CUP	1.575
WIN 296	13.0	.85	.82	NA	1352	13.5	1396	39100	CUP	1.575
H110	13.0	.85	.82	NA	1352	13.5	1396	39100	CUP	1.575
v-N110	12.7	1.06	1.02	1.00	1253	14.0	1394	NA	NA	1.677
v-N105	10.0	.90	.88	NA	1243	10.9	1315	NA	NA	1.677
H4227	12.7	.98	.95	NA	1247	13.7	1308	40900	CUP	1.575
v-3N37	7.7	.70	.66	0.70	1102	8.3	1174	NA	NA	1.677
LONGSHOT	6.1	.50	.49	0.50	1025	7.2	1167	41700	CUP	1.575
v-N350	7.3	.71	.71	0.70	1066	7.9	1150	NA	NA	1.677
v-N340	6.9	.74	.71	0.70	1053	7.4	1118	NA	NA	1.677
ACCUR #7	8.2	.54	.53	0.50	980	9.2	1100	34500	PSI	1.590
TITEGROUP	5.0	.42	.40	NA	948	5.5	1020	40300	CUP	1.575
CFE PISTOL	5.2	.39	.37	NA	903	5.8	1018	33100	PSI	1.575
AUTOCOMP	5.3	.42	.40	NA	869	5.9	997	33700	PSI	1.575
SR4756	4.5	.49	.49	0.50	620	5.7	888	32800	PSI	1.575
IMR 700X	4.0	.54	.53	0.50	668	4.7	846	32500	PSI	1.575
SR7625	4.1	.43	.43	NA	611	5.1	838	33200	PSI	1.575
180 Grain Lead Bullet										
R TRUE BLUE	7.6	.52	.49	0.50	1046	8.4	1162	33000	PSI	1.550
RAM ZIP	5.6	.46	.46	NA	1042	6.2	1158	32670	PSI	1.565
ACCUR #9	10.4	.68	.66	NA	1008	11.6	1145	31356	PSI	1.575
ACCUR #7	8.3	.54	.53	0.50	938	9.2	1067	33852	PSI	1.575
180 Grain XTP										
ACCUR #9	10.8	.71	.71	0.70	1059	12.0	1202	33540	PSI	1.575
187 Grain Lead Bullet										
R ENFORCER	11.7	.81	.76	0.70	1074	13.8	1222	34952	PSI	1.600
ACCUR #9	9.5	.62	.61	NA	1047	11.1	1195	34966	PSI	1.600
ACCUR #7	7.4	.48	.46	NA	935	8.7	1091	34932	PSI	1.600
ACCUR #5	6.8	.42	.40	NA	922	8.0	1064	34818	PSI	1.600
R TRUE BLUE	6.3	.43	.43	NA	929	7.4	1063	34387	PSI	1.600

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
187 Grain Lead Bullet										
ACCUR #2	5.2	.44	.43	NA	855	6.1	963	34989	PSI	1.600
187 Grain Lead Bullet										
RAM ZIP	4.8	.39	.37	NA	827	5.6	945	34252	PSI	1.600
SOLO 1000	4.6	.61	.61	NA	791	5.4	886	34458	PSI	1.600
200 Grain Jacketed Bullet										
v-N110	12.2	1.02	1.02	1.00	1188	12.8	1252	NA	NA	1.697
v-N105	9.3	.84	.82	NA	1106	10.2	1174	NA	NA	1.697
v-3N37	7.1	.65	.61	NA	974	7.7	1041	NA	NA	1.697
v-N350	6.9	.67	.66	NA	945	7.7	1031	NA	NA	1.697
200 Grain Lead Bullet										
ACCUR #2	4.6	.39	.37	NA	781	5.4	884	34943	PSI	1.620

357 MAG

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 06-12-2017 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available