


38 SPECIAL +P

These hot loads may wear guns prematurely.

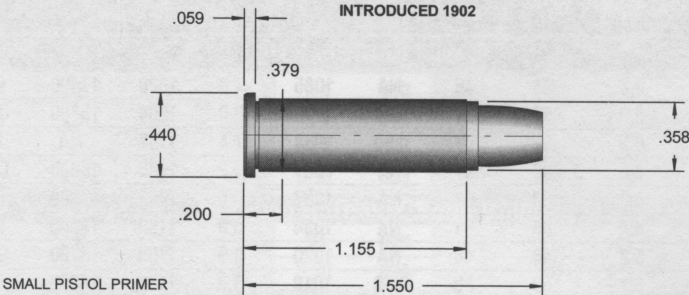

LEE SHELL HOLDER 1
Useful case capacity 1.18 cc

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
77 Grain FRANGIBLE										
WIN 572	6.2	.51	.49	0.50	1351	7.1	1514	18100	PSI	1.475
CFE PISTOL	6.2	.46	.46	NA	1331	7.0	1493	17900	PSI	1.475
AUTOCOMP	6.2	.48	.46	NA	1325	7.0	1486	18500	PSI	1.475
UNIVERSAL	5.5	.60	.57	NA	1310	6.2	1470	17600	PSI	1.475
IMR TARGET	4.8	.58	.57	0.50	1282	5.5	1438	17800	PSI	1.475
TITEGROUP	4.5	.38	.37	NA	1260	5.1	1412	18300	PSI	1.475
WIN 244	4.8	.38	.37	NA	1239	5.5	1389	17800	PSI	1.475
HP38	4.8	.44	.43	NA	1207	5.4	1355	17600	PSI	1.475
84 Grain FRANGIBLE										
CFE PISTOL	6.5	.49	.49	NA	1353	7.4	1516	18100	PSI	1.475
WIN 572	6.7	.55	.53	0.50	1352	7.6	1515	18100	PSI	1.475
AUTOCOMP	6.6	.52	.49	0.50	1343	7.5	1506	18200	PSI	1.475
UNIVERSAL	5.7	.63	.61	NA	1309	6.5	1469	18100	PSI	1.475
IMR TARGET	5.2	.62	.61	NA	1291	5.9	1448	18000	PSI	1.475
WIN 244	5.3	.42	.40	NA	1270	6.0	1424	17900	PSI	1.475
TITEGROUP	4.9	.42	.40	NA	1264	5.6	1416	17800	PSI	1.475
HP38	5.4	.50	.49	0.50	1242	6.1	1392	18200	PSI	1.475
110 Grain Jacketed Bullet										
R SILHOUETTE	6.7	.53	.53	0.50	1233	7.1	1304	19816	PSI	1.435
ACCUR #5	7.1	.44	.43	NA	1172	7.9	1302	19964	PSI	1.435
R TRUE BLUE	6.7	.46	.46	NA	1192	7.4	1279	19786	PSI	1.435
ACCUR #2	4.9	.41	.40	NA	1112	5.3	1183	19963	PSI	1.435
SOLO 1000	4.8	.64	.61	NA	1091	5.2	1153	19957	PSI	1.435
A NITRO100	3.6	.49	.49	NA	976	4.0	1053	19961	PSI	1.435
110 Grain XTP										
CFE PISTOL	6.2	.46	.46	NA	1163	7.0	1303	18400	PSI	1.455
IMR TARGET	4.9	.59	.57	NA	1144	5.6	1283	18600	PSI	1.455
WIN 244	5.5	.43	.43	NA	1136	6.2	1274	18400	PSI	1.455
HS6	7.4	.53	.53	0.50	1131	8.4	1268	19600	CUP	1.455

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

38 SPECIAL +P

38 SPECIAL +P

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
110 Grain XTP										
AUTOCOMP	6.2	.48	.46	NA	1095	7.0	1228	17400	PSI	1.455
UNIVERSAL	5.3	.58	.57	0.50	1075	6.0	1204	18700	CUP	1.455
POWER PISTOL	6.5	.58	.57	0.50	1064	7.4	1192	NA	NA	1.445
TITEGROUP	4.6	.39	.37	NA	1057	5.2	1185	18800	CUP	1.455
SR4756	5.8	.64	.61	NA	1037	6.6	1163	17600	PSI	1.455
IMR RED	4.4	.63	.61	NA	1034	5.0	1159	18300	PSI	1.455
HP38	5.2	.48	.46	NA	1030	5.9	1155	18700	CUP	1.455
SR7625	5.1	.53	.53	0.50	1018	5.8	1142	18200	PSI	1.455
IMR 700X	4.2	.57	.57	0.50	1016	4.8	1140	17700	PSI	1.455
UNIQUE	5.5	.61	.61	NA	995	6.3	1117	NA	NA	1.445
IMR PB	4.3	.52	.49	0.50	984	4.9	1103	17800	PSI	1.455
BULLSEYE	4.6	.49	.49	NA	980	5.2	1098	NA	NA	1.445
AMER-SELECT	4.2	.57	.57	0.50	862	4.8	967	NA	NA	1.445
110 Grain Barnes X Solid Bullet										
ACCUR #7	7.3	.48	.46	NA	1049	8.1	1165	18135	PSI	1.515
R SILHOUETTE	5.7	.45	.43	NA	1049	6.3	1165	18275	PSI	1.515
ACCUR #5	5.9	.37	.37	NA	1026	6.6	1140	17905	PSI	1.515
R TRUE BLUE	5.6	.38	.37	NA	973	6.2	1081	18075	PSI	1.515
RAM ZIP	4.4	.36	.34	NA	917	4.9	1019	18145	PSI	1.515
ACCUR #2	4.1	.34	.34	0.30	905	4.6	1005	18065	PSI	1.515
125 Grain FRANGIBLE										
ACCUR #5	5.7	.36	.34	NA	852	6.3	947	18295	PSI	1.500
125 Grain Copper Plated										
R SILHOUETTE	6.5	.52	.49	0.50	1137	7.1	1232	19964	PSI	1.440
ACCUR #5	7.2	.45	.43	NA	1113	7.8	1204	19278	PSI	1.440
R TRUE BLUE	6.6	.45	.43	NA	1113	7.2	1200	19824	PSI	1.440
RAM ZIP	4.9	.40	.40	NA	1007	5.5	1121	19958	PSI	1.440
ACCUR #2	4.7	.39	.37	NA	1002	5.1	1074	19823	PSI	1.440
SOLO 1000	4.4	.59	.57	0.50	950	5.0	1054	19989	PSI	1.440
A NITRO100	3.5	.47	.46	NA	868	3.9	954	19985	PSI	1.440
125 Grain XTP										
CFE PISTOL	5.6	.42	.40	NA	1070	6.4	1199	18600	PSI	1.455
R SILHOUETTE	6.2	.49	.49	NA	1102	6.7	1188	19989	PSI	1.445
ACCUR #5	6.8	.42	.40	NA	1074	7.5	1184	19836	PSI	1.445
R TRUE BLUE	6.2	.42	.40	NA	1078	6.9	1174	19958	PSI	1.445
HS6	6.9	.49	.49	NA	1015	7.8	1138	19500	CUP	1.455
SR4756	5.4	.59	.57	NA	1006	6.1	1129	18300	PSI	1.455
WIN 244	4.9	.39	.37	NA	1002	5.6	1124	18400	PSI	1.455
ACCUR #2	4.8	.40	.40	NA	1024	5.3	1098	19947	PSI	1.445
UNIQUE	5.3	.58	.57	0.50	965	6.0	1082	NA	NA	1.440
POWER PISTOL	6.0	.53	.53	0.50	965	6.8	1082	NA	NA	1.440
IMR TARGET	4.4	.53	.53	0.50	965	5.0	1082	18000	PSI	1.455
AUTOCOMP	5.6	.44	.43	NA	957	6.4	1073	17600	PSI	1.455
UNIVERSAL	4.8	.52	.49	0.50	956	5.4	1072	18900	CUP	1.455
TITEGROUP	4.4	.37	.37	NA	954	5.0	1069	18700	CUP	1.455
SR7625	4.6	.48	.46	NA	930	5.2	1043	18500	PSI	1.455
IMR RED	4.0	.58	.57	0.50	922	4.6	1034	18400	PSI	1.455
IMR 700X	3.9	.52	.49	0.50	912	4.4	1023	18100	PSI	1.455

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
125 Grain XTP										
BULLSEYE	4.2	.45	.43	NA	910	4.8	1021	NA	NA	1.440
HP38	4.7	.43	.43	NA	908	5.3	1018	19800	CUP	1.455
IMR PB	3.9	.47	.46	NA	878	4.4	985	17600	PSI	1.455
AMER-SELECT	4.1	.55	.53	0.50	839	4.1	839	NA	NA	1.440
125 Grain Barnes X Solid Bullet										
ACCUR #5	5.8	.36	.34	NA	899	6.3	1014	19989	PSI	1.455
ACCUR #2	4.0	.34	.34	0.30	804	4.3	907	19972	PSI	1.455
135 Grain XTP										
POWER PISTOL	5.6	.50	.49	0.50	950	6.4	1065	NA	NA	1.450
UNIQUE	4.6	.50	.49	0.50	881	5.2	988	NA	NA	1.450
140 Grain Lead Bullet										
R SILHOUETTE	5.6	.45	.43	NA	1070	6.1	1150	19834	PSI	1.435
ACCUR #5	6.2	.39	.37	NA	1050	6.8	1128	19953	PSI	1.435
R TRUE BLUE	5.4	.37	.37	NA	1028	6.0	1116	19867	PSI	1.435
ACCUR #2	4.2	.35	.34	0.30	971	4.7	1055	19987	PSI	1.435
A NITRO100	3.0	.40	.40	NA	875	3.4	948	19958	PSI	1.435
140 Grain XTP										
LONGSHOT	5.6	.46	.46	NA	1004	6.4	1126	17700	PSI	1.455
CFE PISTOL	5.3	.40	.40	NA	979	6.0	1097	18600	PSI	1.455
R SILHOUETTE	5.6	.45	.43	NA	992	6.2	1095	19981	PSI	1.445
UNIVERSAL	4.5	.49	.49	NA	911	5.1	1022	19100	CUP	1.455
WIN 244	4.3	.34	.34	0.30	886	4.9	994	17900	PSI	1.455
HS6	6.2	.44	.43	NA	885	7.0	992	18300	CUP	1.455
TITEGROUP	4.0	.34	.34	0.30	878	4.6	984	19300	CUP	1.455
SR4756	4.9	.54	.53	0.50	877	5.6	983	17800	PSI	1.455
ACCUR #2	4.3	.36	.34	NA	886	4.7	979	19569	PSI	1.445
IMR TARGET	4.1	.49	.49	0.50	854	4.7	957	18200	PSI	1.455
IMR RED	4.0	.56	.53	0.50	848	4.5	951	18000	PSI	1.455
SR7625	4.2	.44	.43	NA	834	4.8	935	18300	PSI	1.455
IMR 700X	3.6	.48	.46	NA	814	4.1	913	18200	PSI	1.455
HP38	4.3	.40	.40	NA	796	4.9	892	18600	CUP	1.455
IMR PB	3.6	.43	.43	NA	779	4.1	874	18100	PSI	1.455
146 Grain Jacketed Bullet										
LONGSHOT	5.0	.41	.40	NA	924	5.7	1036	17400	PSI	1.370
HS6	5.9	.42	.40	NA	923	6.7	1035	18400	CUP	1.370
CFE PISTOL	4.8	.36	.34	NA	912	5.5	1023	17700	PSI	1.370
BLUE DOT	6.2	.54	.53	0.50	891	7.1	1000	NA	NA	1.370
UNIVERSAL	4.1	.45	.43	NA	880	4.7	987	18100	CUP	1.370
TITEGROUP	3.9	.33	.32	0.30	875	4.4	981	19300	CUP	1.370
HP38	4.3	.40	.40	NA	870	4.9	975	17700	CUP	1.370
AUTOCOMP	4.6	.36	.34	NA	854	5.2	957	17500	PSI	1.370
UNIQUE	4.5	.49	.49	NA	854	5.1	957	NA	NA	1.370
HERC 2400	7.9	.59	.57	0.50	849	9.0	952	NA	NA	1.370
POWER PISTOL	4.8	.43	.43	NA	834	5.5	935	NA	NA	1.370
WIN 244	3.8	.30	LDPM	0.30	824	4.3	924	18200	PSI	1.370
SR4756	4.5	.49	.49	NA	812	5.1	910	18000	PSI	1.370
SR7625	4.0	.41	.40	NA	776	4.5	871	17600	PSI	1.370
IMR 700X	3.3	.45	.43	NA	761	3.8	854	17400	PSI	1.370

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

38 SPECIAL +P

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
148 Grain Copper Plated										
R SILHOUETTE	4.2	.33	.32	0.30	784	4.6	883	19934	PSI	1.140
148 Grain Wad Cutter										
SOLO 1000	3.1	.41	.40	NA	840	3.5	914	19947	PSI	1.231
A NITRO100	2.5	.34	.34	0.30	812	2.7	856	19961	PSI	1.231
ACCUR #5	4.5	.28	LDPM	NA	717	5.0	843	19926	PSI	1.140
R TRUE BLUE	4.0	.27	LDPM	NA	712	4.4	818	19947	PSI	1.140
158 Grain Jacketed Bullet										
R SILHOUETTE	5.2	.41	.40	NA	913	5.6	1002	19854	PSI	1.430
ACCUR #5	5.6	.35	.34	0.30	886	6.2	983	19931	PSI	1.430
R TRUE BLUE	5.1	.35	.34	0.30	886	5.7	978	19956	PSI	1.430
ACCUR #2	4.0	.34	.34	0.30	810	4.3	889	19879	PSI	1.430
158 Grain Lead Bullet										
POWER PISTOL	5.3	.47	.46	NA	925	6.0	1037	NA	NA	1.440
SOLO 1000	3.6	.48	.46	NA	870	4.0	941	19961	PSI	1.460
UNIQUE	4.6	.50	.49	0.50	820	5.2	919	NA	NA	1.440
BULLSEYE	3.4	.37	.37	NA	779	3.9	874	NA	NA	1.440
A NITRO100	2.7	.36	.34	NA	781	3.0	851	19289	PSI	1.460
RED DOT	3.3	.47	.46	NA	754	3.8	846	NA	NA	1.440
158 Grain Copper Plated										
R SILHOUETTE	5.3	.42	.40	NA	892	5.8	985	19894	PSI	1.430
ACCUR #5	5.8	.36	.34	NA	891	6.4	980	19921	PSI	1.430
R TRUE BLUE	5.2	.36	.34	NA	846	5.7	920	19894	PSI	1.430
ACCUR #2	4.0	.34	.34	0.30	790	4.4	880	19862	PSI	1.430
RAM ZIP	3.9	.32	.32	0.30	743	4.3	849	19857	PSI	1.430
SOLO 1000	3.7	.49	.49	NA	722	4.0	796	19753	PSI	1.430
158 Grain XTP										
CFE PISTOL	4.8	.36	.34	NA	879	5.4	986	18500	PSI	1.455
LONGSHOT	4.8	.40	.40	NA	861	5.5	965	17000	PSI	1.455
SR4756	4.8	.53	.53	0.50	828	5.5	928	17900	PSI	1.455
HS6	5.8	.41	.40	NA	826	6.6	926	18700	CUP	1.455
TITEGROUP	3.8	.32	.32	0.30	807	4.3	905	19300	CUP	1.455
IMR TARGET	3.8	.45	.43	NA	792	4.3	888	18400	PSI	1.455
AUTOCOMP	4.4	.35	.34	0.30	789	5.0	885	17000	PSI	1.455
170 Grain Jacketed Bullet										
LONGSHOT	4.7	.38	.37	NA	838	5.3	939	17800	PSI	1.450
HS6	5.5	.39	.37	NA	800	6.3	897	18600	CUP	1.450
UNIVERSAL	3.8	.42	.40	NA	755	4.3	847	18600	CUP	1.450
TITEGROUP	3.5	.30	LDPM	0.30	754	4.0	846	19000	CUP	1.450
SR4756	4.5	.49	.49	NA	754	5.1	846	17800	PSI	1.450
AUTOCOMP	4.2	.33	.32	0.30	753	4.8	844	18200	PSI	1.450
HP38	3.9	.36	.34	NA	731	4.4	819	18100	CUP	1.450
230 Grain Lead Bullet										
ACCUR #9	6.2	.41	.40	NA	782	6.7	855	19961	PSI	1.505
R TRUE BLUE	3.5	.24	LDPM	NA	645	4.0	723	19921	PSI	1.505
230 Grain Wad Cutter										
ACCUR #7	4.7	.31	.30	0.30	702	5.2	767	19987	PSI	1.460
ACCUR #5	4.0	.25	LDPM	NA	672	4.4	740	19987	PSI	1.460

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available