


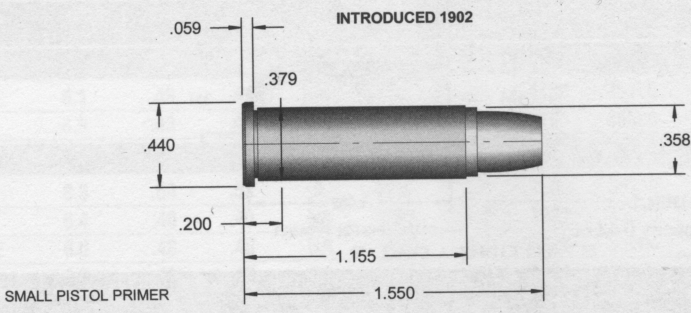

LEE SHELL HOLDER 1

Useful case capacity 1.30 cc

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
77 Grain FRANGIBLE										
WIN 572	6.1	.50	.49	0.50	1278	7.0	1473	17000	PSI	1.475
CFE PISTOL	6.0	.45	.43	NA	1266	6.9	1472	16800	PSI	1.475
UNIVERSAL	5.5	.60	.57	NA	1243	6.1	1431	16400	PSI	1.475
AUTOCOMP	6.3	.50	.49	0.50	1290	6.9	1429	16900	PSI	1.475
IMR TARGET	4.6	.55	.53	0.50	1253	5.4	1408	17000	PSI	1.475
TITEGROUP	4.2	.36	.34	NA	1193	5.0	1377	17100	PSI	1.475
WIN 244	4.6	.36	.34	NA	1197	5.4	1359	16900	PSI	1.475
HP38	4.7	.44	.43	NA	1171	5.3	1300	16800	PSI	1.475
84 Grain FRANGIBLE										
WIN 572	6.9	.57	.57	0.50	1360	7.5	1470	16700	PSI	1.475
AUTOCOMP	6.6	.52	.49	0.50	1247	7.3	1456	17000	PSI	1.475
CFE PISTOL	6.6	.50	.49	0.50	1294	7.2	1451	16700	PSI	1.475
UNIVERSAL	5.7	.63	.61	NA	1289	6.4	1420	16600	PSI	1.475
IMR TARGET	5.0	.60	.57	NA	1265	5.8	1419	17000	PSI	1.475
WIN 244	5.2	.41	.40	NA	1242	5.9	1392	16700	PSI	1.475
TITEGROUP	4.6	.39	.37	NA	1224	5.4	1378	16900	PSI	1.475
HP38	5.4	.50	.49	0.50	1230	6.0	1338	16200	PSI	1.475
90 Grain Lead Bullet										
AUTOCOMP	3.7	.29	LDPM	NA	790	5.1	1089	10800	PSI	1.325
IMR TARGET	2.8	.33	.32	0.30	843	3.9	1081	11500	PSI	1.325
IMR RED	2.5	.36	.34	NA	756	3.8	1079	12700	PSI	1.325
CFE PISTOL	3.7	.28	LDPM	NA	751	5.2	1077	10800	PSI	1.325
TITEGROUP	3.0	.25	LDPM	NA	755	3.5	969	11300	PSI	1.325
CLAYS	2.5	.37	.37	NA	705	3.0	938	11400	PSI	1.325
IMR TRAIL BOS	3.0	.65	.61	NA	740	5.0	904	8100	PSI	1.325
110 Grain Jacketed Bullet										
R SILHOUETTE	6.1	.49	.49	NA	1122	6.7	1221	16944	PSI	1.435
R TRUE BLUE	6.0	.41	.40	NA	1099	6.7	1187	16932	PSI	1.435
ACCUR #5	6.4	.40	.40	NA	1075	7.1	1181	16586	PSI	1.435
ACCUR #2	4.4	.37	.37	NA	1023	4.9	1102	16633	PSI	1.435
SOLO 1000	4.3	.57	.57	0.50	1013	4.8	1083	16990	PSI	1.435

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY FPS	NEVER EXCEED	VELOCITY FPS	PRESS	UNITS	MIN OAL
110 Grain XTP										
v-3N37	7.3	.67	.66	NA	1156	8.2	1308	NA	NA	1.437
v-N350	6.6	.64	.61	NA	1165	7.7	1305	NA	NA	1.437
CFE PISTOL	6.5	.49	.49	NA	1195	6.8	1283	17300	PSI	1.455
v-N320	5.4	.65	.61	NA	1120	6.1	1272	NA	NA	1.437
v-N340	6.2	.66	.66	NA	1130	6.9	1267	NA	NA	1.437
R SILHOUETTE	6.3	.50	.49	0.50	1159	6.9	1267	16160	PSI	1.450
WIN 244	5.0	.39	.37	NA	1070	5.6	1205	16900	PSI	1.455
R TRUE BLUE	5.9	.40	.40	NA	1066	6.6	1184	16330	PSI	1.450
HS6	7.0	.50	.49	0.50	1071	7.8	1178	17000	CUP	1.455
IMR TARGET	4.4	.53	.53	0.50	1016	5.2	1177	17300	PSI	1.455
WIN 572	5.9	.49	.49	NA	992	6.5	1163	16300	PSI	1.455
UNIVERSAL	5.0	.55	.53	0.50	968	5.6	1143	16700	CUP	1.455
RAM ZIP	5.0	.41	.40	NA	1013	5.5	1125	16800	PSI	1.435
TITEGROUP	4.3	.36	.34	NA	1011	4.8	1109	16000	CUP	1.455
AUTOCOMP	5.8	.46	.46	NA	860	6.4	1101	16000	PSI	1.455
HP38	4.6	.43	.43	NA	948	5.5	1096	16300	CUP	1.455
WIN 231	4.6	.43	.43	NA	948	5.5	1096	16300	CUP	1.455
SR7625	4.9	.51	.49	0.50	929	5.5	1092	16500	PSI	1.455
SR4756	5.5	.60	.57	NA	913	6.2	1083	15200	PSI	1.455
IMR 700X	4.0	.54	.53	0.50	986	4.6	1078	16500	PSI	1.455
POWER PISTOL	5.8	.52	.49	0.50	958	6.6	1074	NA	NA	1.455
CLAYS	4.0	.58	.57	0.50	1002	4.2	1073	17000	CUP	1.455
IMR RED	4.0	.57	.57	0.50	943	4.5	1071	16300	PSI	1.455
UNIQUE	5.1	.56	.53	0.50	950	5.8	1065	NA	NA	1.455
IMR PB	4.3	.52	.49	0.50	953	4.8	1063	16400	PSI	1.455
R COMPETITION	3.6	.46	.46	NA	949	4.0	1054	16400	PSI	1.450
124 Grain Lead Bullet										
v-N350	5.9	.58	.57	0.50	1101	6.8	1215	NA	NA	1.437
v-3N37	6.3	.58	.57	0.50	1079	7.0	1205	NA	NA	1.437
v-N340	5.7	.61	.61	NA	1063	6.4	1203	NA	NA	1.437
v-N320	4.5	.54	.53	0.50	1015	5.2	1159	NA	NA	1.437
125 Grain Jacketed Bullet										
R SILHOUETTE	6.2	.49	.49	NA	1105	6.7	1192	16620	PSI	1.447
R TRUE BLUE	5.7	.39	.37	NA	990	6.3	1100	16320	PSI	1.447
RAM ZIP	4.8	.39	.37	NA	988	5.3	1098	16640	PSI	1.447
R COMPETITION	3.5	.45	.43	NA	878	3.9	975	16410	PSI	1.447
125 Grain Lead Bullet										
CFE PISTOL	5.2	.39	.37	NA	1044	6.2	1201	16100	PSI	1.445
R SILHOUETTE	5.7	.45	.43	NA	1066	6.2	1157	16150	PSI	1.440
WIN 244	4.4	.35	.34	0.30	994	5.2	1142	16600	PSI	1.445
AUTOCOMP	5.7	.45	.43	NA	1048	6.2	1139	10800	PSI	1.455
RAM ZIP	4.4	.36	.34	NA	1001	4.9	1112	16770	PSI	1.440
WIN 572	5.0	.41	.40	NA	972	5.8	1112	16000	PSI	1.445
R TRUE BLUE	5.6	.38	.37	NA	999	6.2	1110	16450	PSI	1.440
SR4756	5.4	.59	.57	NA	974	6.0	1091	16100	PSI	1.445
IMR TARGET	3.1	.37	.37	NA	853	4.3	1077	14600	PSI	1.445
IMR 700X	3.7	.50	.49	0.50	982	4.2	1076	16200	PSI	1.445
SR7625	4.6	.48	.46	NA	966	5.2	1075	16700	PSI	1.445
HP38	3.8	.35	.34	0.30	876	4.8	1071	16900	CUP	1.445

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.
Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

38 SPECIAL

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
125 Grain Lead Bullet										
WIN 231	3.8	.35	.34	NA	876	4.8	1071	16900	CUP	1.445
IMR RED	3.0	.43	.43	NA	826	4.2	1066	16400	PSI	1.445
IMR PB	4.0	.48	.46	NA	959	4.5	1060	16500	PSI	1.445
UNIVERSAL	4.3	.47	.46	NA	872	4.7	1036	16800	CUP	1.445
R COMPETITION	3.2	.41	.40	NA	903	3.6	1003	16790	PSI	1.440
TITEGROUP	3.2	.27	LDPM	NA	856	3.8	985	12000	CUP	1.445
CLAYS	2.5	.37	.37	NA	810	3.5	978	16900	CUP	1.445
IMR TRAIL BOS	3.0	.65	.61	NA	753	5.3	952	13400	PSI	1.445
125 Grain FRANGIBLE										
R SILHOUETTE	5.2	.41	.40	NA	816	5.7	894	16085	PSI	1.500
ACCUR #5	5.4	.34	.34	0.30	785	6.0	872	16925	PSI	1.500
R TRUE BLUE	5.0	.34	.34	0.30	743	5.5	826	16925	PSI	1.500
RAM ZIP	4.0	.33	.32	0.30	642	4.4	713	16095	PSI	1.500
ACCUR #2	3.4	.28	LDPM	NA	552	3.8	613	16155	PSI	1.500
125 Grain Copper Plated										
v-3N37	6.2	.57	.57	0.50	1017	7.2	1187	NA	NA	1.437
v-N350	5.9	.58	.57	0.50	997	6.9	1160	NA	NA	1.437
v-N340	5.2	.55	.53	0.50	1002	6.3	1146	NA	NA	1.437
R SILHOUETTE	6.1	.49	.49	NA	1066	6.5	1137	16661	PSI	1.440
ACCUR #5	6.4	.40	.40	NA	1007	7.2	1112	16776	PSI	1.440
R TRUE BLUE	5.9	.40	.40	NA	1009	6.6	1108	16908	PSI	1.440
v-N320	4.5	.54	.53	0.50	960	5.2	1089	NA	NA	1.437
ACCUR #2	4.2	.35	.34	0.30	933	4.7	1005	16613	PSI	1.440
RAM ZIP	4.4	.36	.34	NA	895	4.9	997	16761	PSI	1.440
SOLO 1000	4.0	.53	.53	0.50	879	4.4	955	16963	PSI	1.440
A NITRO100	3.2	.43	.43	NA	791	3.5	868	16901	PSI	1.440
125 Grain XTP										
v-N350	6.5	.64	.61	NA	1058	7.5	1224	NA	NA	1.437
v-N337	6.8	.62	.61	NA	1045	7.5	1204	NA	NA	1.437
v-N340	5.8	.62	.61	NA	1042	6.7	1178	NA	NA	1.437
CFE PISTOL	5.4	.41	.40	NA	995	6.3	1133	16000	PSI	1.455
v-N320	4.9	.59	.57	NA	981	5.6	1121	NA	NA	1.437
R SILHOUETTE	5.8	.46	.46	NA	1039	6.2	1109	16845	PSI	1.445
ACCUR #5	6.1	.38	.37	NA	981	6.8	1081	16708	PSI	1.445
R TRUE BLUE	5.6	.38	.37	NA	995	6.2	1081	16925	PSI	1.445
WIN 244	4.7	.37	.37	NA	951	5.2	1077	16600	PSI	1.455
WIN 572	5.4	.44	.43	NA	960	5.9	1069	16800	PSI	1.455
AUTOCOMP	5.7	.45	.43	NA	985	6.2	1068	16500	PSI	1.455
IMR TARGET	3.9	.47	.46	NA	919	4.6	1051	16800	PSI	1.455
HS6	6.5	.46	.46	NA	931	7.2	1048	16600	CUP	1.455
SR4756	5.3	.58	.57	0.50	939	6.0	1046	16400	PSI	1.455
UNIVERSAL	4.7	.52	.49	0.50	918	5.2	1019	17000	CUP	1.455
ACCUR #2	4.3	.36	.34	NA	933	4.8	1017	16903	PSI	1.445
TITEGROUP	4.3	.36	.34	NA	953	4.6	1010	15600	CUP	1.455
SR7625	4.5	.47	.46	NA	875	5.1	999	16300	PSI	1.455
POWER PISTOL	5.4	.48	.46	NA	879	6.1	986	NA	NA	1.440
UNIQUE	5.0	.55	.53	0.50	874	5.7	980	NA	NA	1.440
IMR 700X	3.6	.48	.46	NA	863	4.2	969	17000	PSI	1.455
CLAYS	3.5	.51	.49	0.50	843	3.9	937	16100	CUP	1.455

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
LDPM = use LEE Drum Powder Measure with these loads.

Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
125 Grain Barnes X Solid Bullet										
R TRUE BLUE	4.7	.32	.32	0.30	775	5.3	883	16868	PSI	1.455
ACCUR #2	3.6	.30	.30	0.30	709	4.0	814	16905	PSI	1.455
130 Grain Lead Bullet										
CFE PISTOL	5.3	.40	.40	NA	1053	6.1	1175	17100	PSI	1.460
WIN 244	4.6	.36	.34	NA	1035	5.1	1129	16800	PSI	1.460
IMR TARGET	3.5	.42	.40	NA	915	4.8	1126	16400	PSI	1.460
WIN 572	5.1	.42	.40	NA	980	5.8	1103	17000	PSI	1.460
AUTOCOMP	5.5	.43	.43	NA	981	6.0	1072	15800	PSI	1.460
IMR RED	3.4	.48	.46	NA	884	4.3	1071	16600	PSI	1.460
UNIVERSAL	4.7	.52	.49	0.50	957	5.2	1056	16000	PSI	1.460
SR7625	4.6	.48	.46	NA	925	5.2	1055	16800	PSI	1.460
SR4756	5.3	.58	.57	0.50	916	5.9	1046	15300	PSI	1.460
TITEGROUP	3.6	.31	.30	0.30	922	4.2	1018	15900	PSI	1.460
HP38	4.1	.38	.37	NA	880	4.7	1008	16100	PSI	1.460
IMR PB	3.9	.47	.46	NA	887	4.4	996	16500	PSI	1.460
IMR 700X	3.5	.47	.46	NA	870	4.1	996	16500	PSI	1.460
135 Grain Lead Bullet										
WIN 244	4.2	.33	.32	0.30	968	4.8	1067	15900	PSI	1.418
UNIVERSAL	4.1	.45	.43	NA	924	4.6	1025	16900	CUP	1.418
HP38	3.7	.34	.34	0.30	872	4.7	1024	17000	CUP	1.418
WIN 231	3.7	.34	.34	0.30	872	4.7	1024	17000	CUP	1.418
TITEGROUP	3.1	.26	LDPM	NA	824	3.6	927	12900	CUP	1.418
CLAYS	2.6	.38	.37	NA	767	3.3	910	16200	CUP	1.418
140 Grain Jacketed Bullet										
v-3N37	6.2	.57	.57	0.50	925	7.1	1117	NA	NA	1.437
v-N350	6.2	.61	.61	NA	925	6.9	1102	NA	NA	1.437
v-N340	5.6	.60	.57	NA	902	6.2	1079	NA	NA	1.437
v-N320	4.6	.56	.53	0.50	878	5.3	1051	NA	NA	1.437
ACCUR #2	4.2	.35	.34	0.30	781	4.7	888	16700	PSI	1.445
ACCUR #5	5.8	.36	.34	NA	757	6.4	860	16700	PSI	1.445
140 Grain Lead Bullet										
CFE PISTOL	5.0	.38	.37	NA	940	5.8	1107	16200	PSI	1.450
HS6	6.1	.43	.43	NA	960	6.8	1091	16300	PSI	1.450
WIN 244	4.2	.33	.32	0.30	955	4.9	1072	16800	PSI	1.450
R SILHOUETTE	5.2	.41	.40	NA	1004	5.6	1068	16645	PSI	1.435
IMR TARGET	3.6	.43	.43	NA	923	4.5	1060	16900	PSI	1.450
AUTOCOMP	5.2	.41	.40	NA	971	5.8	1055	16100	PSI	1.450
RAM ZIP	4.1	.33	.32	0.30	945	4.5	1050	16640	PSI	1.445
ACCUR #5	5.6	.35	.34	0.30	960	6.2	1049	16849	PSI	1.435
R TRUE BLUE	4.9	.34	.34	0.30	949	5.4	1028	16424	PSI	1.435
SR4756	5.1	.56	.53	0.50	946	5.7	1018	15900	PSI	1.450
IMR RED	2.5	.36	.34	NA	695	4.2	1015	16500	PSI	1.450
TITEGROUP	2.5	.21	LDPM	NA	675	4.4	1010	16500	PSI	1.450
UNIVERSAL	4.4	.48	.46	NA	889	4.9	1009	15600	PSI	1.450
WIN 572	4.2	.35	.34	0.30	846	5.0	996	16200	PSI	1.450
IMR 700X	2.5	.34	.34	0.30	693	4.3	993	16400	PSI	1.450
SR7625	4.5	.47	.46	NA	877	5.1	985	15200	PSI	1.450
WIN 231	4.1	.38	.37	NA	861	4.6	980	16100	PSI	1.450

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 01-29-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
140 Grain XTP										
CFE PISTOL	5.2	.39	.37	NA	934	5.7	1008	16300	PSI	1.455
R SILHOUETTE	5.3	.42	.40	NA	937	5.6	1003	16506	PSI	1.445
AUTOCOMP	5.0	.39	.37	NA	880	5.5	989	16600	PSI	1.455
ACCUR #5	5.5	.34	.34	0.30	889	6.2	976	16581	PSI	1.445
R TRUE BLUE	5.1	.35	.34	0.30	886	5.6	974	16812	PSI	1.445
WIN 572	4.8	.40	.40	NA	816	5.5	958	16900	PSI	1.455
UNIVERSAL	4.3	.47	.46	NA	832	4.8	939	15400	CUP	1.455
SR4756	4.9	.54	.53	0.50	774	5.5	938	16900	PSI	1.455
WIN 244	3.9	.31	.30	0.30	797	4.5	934	16700	PSI	1.455
RAM ZIP	4.1	.33	.32	0.30	840	4.5	933	16550	PSI	1.438
HS6	5.8	.41	.40	NA	808	6.5	933	16000	CUP	1.455
IMR TARGET	3.5	.42	.40	NA	700	4.4	926	16900	PSI	1.455
TITEGROUP	3.9	.33	.32	0.30	864	4.2	919	15800	CUP	1.455
ACCUR #2	3.9	.33	.32	0.30	802	4.3	897	16246	PSI	1.445
IMR RED	3.5	.50	.49	0.50	756	4.1	889	16400	PSI	1.455
SR7625	4.2	.44	.43	NA	751	4.7	872	16100	PSI	1.455
CLAYS	3.0	.44	.43	NA	703	3.7	869	16700	CUP	1.455
WIN 231	4.2	.39	.37	NA	809	4.6	861	15800	CUP	1.455
HP38	4.2	.39	.37	NA	809	4.6	861	15800	CUP	1.455
IMR 700X	3.3	.44	.43	NA	736	3.8	849	16400	PSI	1.455
145 Grain Lead Bullet										
v-N350	5.4	.53	.53	0.50	969	6.4	1136	NA	NA	1.476
v-N340	5.1	.54	.53	0.50	966	5.8	1118	NA	NA	1.476
v-3N37	5.5	.50	.49	0.50	940	6.0	1077	NA	NA	1.476
v-N320	3.9	.47	.46	NA	886	4.6	1004	NA	NA	1.476
146 Grain Jacketed Bullet										
v-3N37	5.4	.49	.49	NA	863	6.1	1018	NA	NA	1.378
v-N350	5.2	.51	.49	0.50	869	5.9	1010	NA	NA	1.378
v-N340	4.6	.49	.49	NA	856	5.4	1004	NA	NA	1.378
HS6	5.6	.40	.40	NA	808	6.3	969	16100	CUP	1.370
CFE PISTOL	4.7	.35	.34	NA	845	5.1	964	15700	PSI	1.370
UNIVERSAL	4.0	.44	.43	NA	788	4.5	933	16100	CUP	1.370
TITEGROUP	3.5	.30	LDPM	0.30	808	4.0	914	16000	CUP	1.370
WIN 244	3.6	.28	LDPM	NA	791	4.1	898	16800	PSI	1.370
AUTOCOMP	4.6	.36	.34	NA	796	5.0	881	14700	PSI	1.370
HP38	4.0	.37	.37	NA	773	4.5	876	15500	CUP	1.370
WIN 231	4.0	.37	.37	NA	773	4.5	876	15500	CUP	1.370
SR4756	4.3	.47	.46	NA	686	4.8	851	15900	PSI	1.370
IMR 700X	3.2	.43	.43	NA	724	3.6	815	16000	PSI	1.370
148 Grain Wad Cutter										
R SILHOUETTE	4.5	.36	.34	NA	925	4.9	1006	16940	PSI	1.231
v-N350	4.1	.40	.40	NA	835	4.6	964	NA	NA	1.181
WIN 231	3.5	.33	.32	0.30	869	4.0	956	15900	CUP	1.160
HP38	3.5	.32	.32	0.30	869	4.0	956	15900	CUP	1.160
HS6	4.5	.32	.32	0.30	816	5.2	943	14300	CUP	1.160
R TRUE BLUE	4.2	.29	LDPM	NA	849	4.7	943	16590	PSI	1.231
UNIVERSAL	2.9	.32	.32	0.30	709	3.8	940	15600	CUP	1.160
RAM ZIP	3.2	.26	LDPM	NA	835	3.6	928	16500	PSI	1.231
v-N340	3.6	.38	.37	NA	812	4.1	926	NA	NA	1.181

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

STARTING LOADS

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
148 Grain Wad Cutter										
CFE PISTOL	3.5	.26	LDPM	NA	849	3.9	914	15700	PSI	1.160
v-N330	3.3	.36	.34	NA	784	3.8	910	NA	NA	1.181
TITEGROUP	2.7	.23	LDPM	NA	771	3.3	908	11800	CUP	1.160
AUTOCOMP	3.7	.29	LDPM	NA	820	4.1	881	15200	PSI	1.160
v-N320	3.0	.36	.34	NA	776	3.5	876	NA	NA	1.181
IMR TARGET	2.4	.29	LDPM	NA	762	3.0	873	16500	PSI	1.160
SR4756	3.5	.38	.37	NA	732	4.0	854	16200	PSI	1.160
SOLO 1000	2.8	.37	.37	NA	796	3.1	851	16840	PSI	1.231
IMR PB	2.6	.31	.30	0.30	745	3.0	840	16300	PSI	1.160
CLAYS	2.3	.34	.34	0.30	784	2.5	836	13200	CUP	1.160
IMR RED	1.9	.27	LDPM	NA	628	2.8	828	16600	PSI	1.160
WIN 244	2.5	.20	LDPM	.17	736	2.8	817	15900	PSI	1.160
R COMPETITION	2.3	.29	LDPM	NA	727	2.5	808	16430	PSI	1.231
ACCUR #5	3.6	.22	LDPM	NA	710	4.0	807	16200	PSI	1.152
RED DOT	2.6	.37	.37	NA	719	3.0	806	NA	NA	1.155
IMR 700X	2.0	.27	LDPM	NA	686	2.5	804	16000	PSI	1.160
BULLSEYE	2.7	.29	LDPM	NA	713	3.1	799	NA	NA	1.155
150 Grain Jacketed Bullet										
ACCUR #2	4.2	.35	.34	0.30	751	4.7	853	17000	PSI	1.450
ACCUR #5	5.9	.36	.34	NA	715	6.5	813	16600	PSI	1.450
158 Grain Jacketed Bullet										
v-N350	5.5	.54	.53	0.50	855	6.3	1013	NA	NA	1.437
v-3N37	5.9	.54	.53	0.50	848	6.6	999	NA	NA	1.437
v-N340	4.9	.52	.49	0.50	791	5.6	983	NA	NA	1.437
R SILHOUETTE	4.8	.38	.37	NA	841	5.2	913	16610	PSI	1.430
v-N320	3.9	.47	.46	NA	715	4.6	892	NA	NA	1.437
ACCUR #5	5.0	.31	.30	0.30	795	5.6	882	16591	PSI	1.430
158 Grain Lead Bullet										
R SILHOUETTE	5.2	.41	.40	NA	972	5.6	1046	16720	PSI	1.477
CFE PISTOL	4.4	.33	.32	0.30	927	5.0	1029	16700	PSI	1.475
R TRUE BLUE	5.0	.34	.34	0.30	912	5.6	1013	16460	PSI	1.477
HS6	5.7	.41	.40	NA	928	6.3	1010	16200	CUP	1.475
AUTOCOMP	4.8	.38	.37	NA	870	5.3	984	16800	PSI	1.475
UNIVERSAL	3.5	.38	.37	NA	756	4.5	974	16700	CUP	1.475
RAM ZIP	3.8	.31	.30	0.30	870	4.2	967	16390	PSI	1.477
IMR TARGET	3.2	.38	.37	NA	839	3.9	955	16000	PSI	1.475
WIN 244	3.6	.28	LDPM	NA	862	4.0	955	16100	PSI	1.475
SR4756	4.7	.52	.49	0.50	812	5.3	954	16300	PSI	1.475
POWER PISTOL	4.8	.42	.40	NA	846	5.4	948	NA	NA	1.440
ACCUR #5	5.3	.33	.32	0.30	827	5.9	940	16100	PSI	1.481
IMR RED	2.9	.41	.40	NA	787	3.7	927	16600	PSI	1.475
WIN 572	3.7	.30	.30	0.30	776	4.5	926	16400	PSI	1.475
TITEGROUP	3.2	.27	LDPM	NA	815	3.8	920	15400	CUP	1.475
SR7625	3.7	.39	.37	NA	790	4.2	894	16100	PSI	1.475
CLAYS	2.8	.41	.40	NA	812	3.1	871	15100	CUP	1.475
SOLO 1000	3.2	.43	.43	NA	813	3.6	871	16838	PSI	1.460
ACCUR #2	3.6	.30	.30	0.30	764	4.0	868	14100	PSI	1.481
IMR 700X	3.0	.40	.40	NA	795	3.4	867	15800	PSI	1.475
IMR PB	3.2	.39	.37	NA	744	3.7	861	15500	PSI	1.475

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger

LDPM = use LEE Drum Powder Measure with these loads.

Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge

NA = None Available

STARTING LOADS

38 SPECIAL

POWDER TYPE	START GRAINS	VOLUME CC	AUTO DISK	LEE DIPPER	VELOCITY F P S	NEVER EXCEED	VELOCITY F P S	PRESS	UNITS	MIN O A L
158 Grain Copper Plated										
v-3N37	5.6	.51	.49	0.50	853	6.5	1015	NA	NA	1.476
v-N350	5.5	.54	.53	0.50	856	6.3	1004	NA	NA	1.476
v-N340	4.9	.52	.49	0.50	809	5.7	967	NA	NA	1.476
ACCUR #5	5.1	.32	.32	0.30	829	5.7	943	16900	PSI	1.430
v-N320	3.9	.47	.46	NA	776	4.8	927	NA	NA	1.476
R SILHOUETTE	4.8	.38	.37	NA	817	5.3	891	16658	PSI	1.430
R TRUE BLUE	4.6	.31	.30	0.30	754	5.2	837	16867	PSI	1.430
ACCUR #2	3.6	.30	.30	0.30	709	4.0	800	16341	PSI	1.430
158 Grain XTP										
R SILHOUETTE	5.2	.41	.40	NA	902	5.6	969	16410	PSI	1.434
CFE PISTOL	4.6	.35	.34	0.30	816	5.0	914	16200	PSI	1.455
R TRUE BLUE	4.8	.33	.32	0.30	813	5.3	903	16610	PSI	1.434
SR4756	4.8	.53	.53	0.50	774	5.3	888	16400	PSI	1.455
AUTOCOMP	4.5	.35	.34	NA	751	4.9	865	16800	PSI	1.455
HS6	5.6	.40	.40	NA	761	6.2	862	16300	CUP	1.455
ACCUR #5	5.2	.32	.32	0.30	740	5.8	841	16500	PSI	1.445
RAM ZIP	3.7	.30	.30	0.30	756	4.1	840	16360	PSI	1.434
SR7625	4.0	.42	.40	NA	692	4.5	825	16300	PSI	1.455
IMR TARGET	3.3	.39	.37	NA	664	3.8	800	16900	PSI	1.455
IMR 700X	3.2	.43	.43	NA	688	3.7	798	15900	PSI	1.455
TITEGROUP	3.5	.30	LDPM	0.30	704	3.9	798	15900	CUP	1.455
IMR PB	3.5	.42	.40	NA	688	3.9	793	16500	PSI	1.455
IMR RED	3.4	.48	.46	NA	641	3.7	780	16700	PSI	1.455
HP38	3.8	.35	.34	0.30	661	4.3	779	15900	CUP	1.455
WIN 231	3.8	.35	.34	NA	661	4.3	779	15900	CUP	1.455
UNIVERSAL	4.0	.44	.43	NA	678	4.4	778	16200	CUP	1.455
WIN 244	3.4	.27	LDPM	NA	665	3.8	772	16200	PSI	1.455
WIN 572	3.8	.31	.30	0.30	574	4.5	770	16600	PSI	1.455
ACCUR #2	3.6	.30	.30	0.30	665	4.0	756	16500	PSI	1.445
160 Grain Lead Bullet										
v-N340	5.1	.54	.53	0.50	974	5.8	1107	NA	NA	1.476
v-N350	5.4	.53	.53	0.50	963	6.1	1077	NA	NA	1.476
v-3N37	5.3	.48	.46	NA	909	6.2	1064	NA	NA	1.476
170 Grain Jacketed Bullet										
HS6	5.3	.38	.37	NA	710	5.9	832	16100	CUP	1.450
UNIVERSAL	3.8	.42	.40	NA	744	4.2	823	16100	CUP	1.450
AUTOCOMP	4.3	.34	.34	0.30	736	4.8	820	16000	PSI	1.450
SR4756	4.4	.48	.46	NA	665	4.9	800	15900	PSI	1.450
SR7625	4.0	.42	.40	NA	654	4.4	766	16100	PSI	1.450
TITEGROUP	3.0	.25	LDPM	NA	635	3.6	764	16000	CUP	1.450
WIN 231	3.8	.35	.34	NA	683	4.1	752	15800	CUP	1.450
HP38	3.8	.35	.34	0.30	683	4.1	752	15800	CUP	1.450
IMR 700X	3.1	.42	.40	NA	639	3.5	735	16700	PSI	1.450
IMR PB	3.3	.40	.40	NA	627	3.6	706	16000	PSI	1.450

CAUTION with NEVER EXCEED LOADS, maintain Minimum Overall Length or larger
 LDPM = use LEE Drum Powder Measure with these loads.
 Copyright 01-28-2019 Lee Precision, Inc. Hartford WI 53027

c = Compressed charge
 NA = None Available