


Cartridge

30-30 Win - 150 grain

Version 9.0

NOSLER®

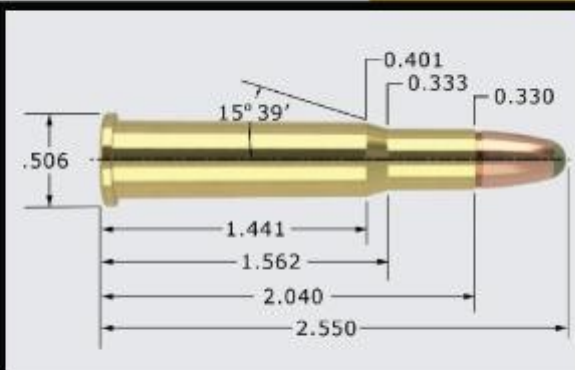

30-30 Win - 150 grain

30 Cal. (.308")


MAXIMUM SAAMI O.A.C.L.			2.550"	TESTED O.A.C.L.	B.C.	S.D.
CT® Ballistic Silvertip®		BST	150gr. RNBT	2.550"	0.232	0.226
Expansion Tip®		ET	150gr. RNBT	2.500"	0.344	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.						
CASE TYPE:	Winchester		PRIMER TYPE		WLR	
CASE HOLDS:	36.6	Gr. WATER	BARREL Length/Make		20" Wiseman	
			BARREL Twist		1-12"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
TAC	31.5	MAX. 2147			87%	
	29.5	* 2065			82%	
	27.5	1982			76%	
W748	35.0	* MAX. 2178			100%	
	33.0	2033			94%	
	31.0	1888			88%	
H4895	33.0	* MAX. 2183			99%	
	31.0	2049			93%	
	29.0	1914			87%	
AA 2460	34.0	* MAX. 2193			94%	
	32.0	2070			88%	
	30.0	1947			83%	
Varget	34.5	* MAX. 2206			**	102%
	32.5	2086				96%
	30.5	1967				90%
IMR 4895 Most Accurate Powder Tested	32.0	MAX. 2247				95%
	30.0	2133				89%
	28.0	* 2020				83%
IMR 3031	31.0	* MAX. 2255				94%
	29.0	2118				88%
	27.0	1981				82%
IMR 4198	26.0	MAX. 2260				82%
	24.0	2110				76%
	22.0	* 1960				70%

Cartridge

30-30 Win - 170 grain

Version 9.0

NOSLER®

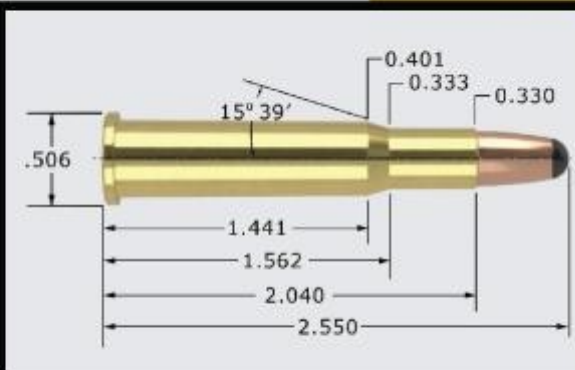

30-30 Win - 170 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.			2.550"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	170gr. RN		2.550"	0.252	0.256
CASE TYPE:	Winchester		PRIMER TYPE	WLR		
CASE HOLDS:	34.6	Gr. WATER	BARREL Length/Make	20" Wiseman		
			BARREL Twist	1-12"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL15	31.5	MAX. 1979				95%
	29.5	1837				89%
	27.5	* 1696				83%
AA 2520	32.5	MAX. 1989				97%
	30.5	* 1889				91%
	28.5	1789				85%
Benchmark	28.0	MAX. 1999				87%
	26.0	* 1874				81%
	24.0	1749				75%
TAC	30.0	MAX. 2034				88%
	28.0	* 1964				82%
	26.0	1893				76%
H414	37.0	* MAX. 2062		**		111%
	35.0	1947		**		105%
	33.0	1832				99%
W748	34.0	MAX. 2066		**		102%
	32.0	* 1949				96%
	30.0	1832				90%
IMR 4895	31.0	* MAX. 2160				97%
	29.0	2030				91%
	27.0	1900				85%
Varget	32.5	MAX. 2163		**		102%
Most Accurate	30.5	1953				95%
Powder Tested	28.5	* 1744				89%
IMR 3031	30.0	MAX. 2168				96%
	28.0	1953				90%